

# LilyPond

---

The music typesetter

## Usage

### The LilyPond development team

This file explains how to execute the programs distributed with LilyPond version 2.24.2. In addition, it suggests some “best practices” for efficient usage.

For more information about how this manual fits with the other documentation, or to read this manual in other formats, see Section “Manuals” in *General Information*.

If you are missing any manuals, the complete documentation can be found at <https://lilypond.org/>.

Copyright © 1999–2022 by the authors.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.1 or any later version published by the Free Software Foundation; with no Invariant Sections. A copy of the license is included in the section entitled “GNU Free Documentation License”.

For LilyPond version 2.24.2

---

# Table of Contents

<b>1</b>	<b>Running lilypond</b>	<b>1</b>
1.1	Normal usage	1
1.2	Command-line usage	1
	Invoking lilypond	1
	Using LilyPond with standard shell features	1
	Basic command line options for LilyPond	2
	Advanced command line options for LilyPond	6
	Environment variables	10
	Relocation	11
	Relocation files	11
	Relocation algorithm	12
	LilyPond in chroot jail	12
1.3	Error messages	14
1.4	Common errors	15
	Music runs off the page	15
	An extra staff appears	15
	Error message Unbound variable %	16
	Error message FT_Get_Glyph_Name	16
	Warning staff affinities should only decrease	16
	Error message unexpected \new	16
	Warning this voice needs a \voiceXx or \shiftXx setting	17
<b>2</b>	<b>Updating files with convert-ly</b>	<b>18</b>
2.1	Why does the syntax change?	18
2.2	Invoking convert-ly	18
2.3	Command line options for convert-ly	19
2.4	Problems running convert-ly	20
2.5	Manual conversions	21
2.6	Writing code to support multiple versions	22
<b>3</b>	<b>Running lilypond-book</b>	<b>23</b>
3.1	An example of a musicological document	23
3.2	Integrating music and text	27
	3.2.1 L <sup>A</sup> T <sub>E</sub> X	27
	3.2.2 Texinfo	29
	3.2.3 HTML	30
	3.2.4 DocBook	30
3.3	Music fragment options	31
3.4	Invoking lilypond-book	35
3.5	Filename extensions	38
3.6	lilypond-book templates	38
	3.6.1 L <sup>A</sup> T <sub>E</sub> X	38
	3.6.2 Texinfo	39
	3.6.3 html	39
	3.6.4 xelatex	40
3.7	Sharing the table of contents	41
3.8	Alternative methods of mixing text and music	42

<b>4</b>	<b>External programs</b>	<b>43</b>
4.1	Point and click	43
4.1.1	Configuring the system	43
	Using GNOME	43
	Extra configuration for Evince	44
	Enabling point and click	44
	Selective point-and-click	44
4.2	Text editor support	45
	Emacs mode	45
	Vim mode	45
	Other editors	46
4.3	Converting from other formats	46
4.3.1	Invoking midi2ly	46
4.3.2	Invoking musicxml2ly	47
4.3.3	Invoking abc2ly	48
4.3.4	Invoking etf2ly	49
4.3.5	Other formats	50
4.4	LilyPond output in other programs	50
4.4.1	LuaTeX	50
4.4.2	OpenOffice and LibreOffice	50
4.4.3	Other programs	50
4.5	Independent includes	51
4.5.1	MIDI articulation	51
<b>5</b>	<b>Suggestions for writing files</b>	<b>52</b>
5.1	General suggestions	52
5.2	Typesetting existing music	53
5.3	Large projects	53
5.4	Troubleshooting	54
5.5	Make and Makefiles	55
<b>Appendix A</b>	<b>GNU Free Documentation License</b>	<b>62</b>
<b>Appendix B</b>	<b>LilyPond index</b>	<b>69</b>

# 1 Running lilypond

This chapter details the technicalities of running LilyPond.

## 1.1 Normal usage

Most users run LilyPond through a GUI; if you have not done so already, please read the Section “Tutorial” in *Learning Manual*. If you use an alternate editor to write LilyPond files, see the documentation for that program.

## 1.2 Command-line usage

This section contains extra information about using LilyPond on the command-line. This may be desirable to pass extra options to the program. In addition, there are certain extra ‘helper’ programs (such as `midi2ly`) which are only available on the command-line.

By ‘command-line’, we mean the command line in the operating system. Windows users might be more familiar with the terms ‘DOS shell’ or ‘command shell’. MacOS X users might be more familiar with the terms ‘terminal’ or ‘console’.

Describing how to use this part of an operating system is outside the scope of this manual; please consult other documentation on this topic if you are unfamiliar with the command-line.

### Invoking lilypond

The `lilypond` executable may be called as follows from the command line.

```
lilypond [option]... file...
```

When invoked with a filename that has no extension, the `.ly` extension is tried first. To read input from stdin, use a dash (-) for *file*.

**Note:** On Windows prior to Windows 10 1903, LilyPond cannot handle Unicode file names.

When `filename.ly` is processed it produces `filename.pdf` as output by default. Several files can be specified; they are each processed independently.<sup>1</sup>

If `filename.ly` contains more than one `\book` block, the rest of the scores is output in numbered files, starting with `filename-1.pdf`. In addition, the value of `output-suffix` is inserted between the basename and the number. For example, if `filename.ly` contains

```

#(define output-suffix "violin")
\score { ... }
#(define output-suffix "cello")
\score { ... }
```

LilyPond outputs `filename-violin.pdf` and `filename-cello-1.pdf`.

### Using LilyPond with standard shell features

Since LilyPond is a command line application, features of the ‘shell’ used for calling LilyPond can also be put to good use.

For example,

```
lilypond *.ly
```

processes all LilyPond files in the current directory.

---

<sup>1</sup> The status of `GUILE` is not reset after processing a `.ly` file, so be careful not to change any system defaults from within Scheme.

Redirecting the console output (e.g., to a file) may also be useful:

```
lilypond file.ly 1> stdout.txt
lilypond file.ly 2> stderr.txt
lilypond file.ly &> all.txt
```

The above commands divert ‘normal’ output, ‘errors’ only, or ‘everything’, respectively, to text files. Consult the documentation for your particular shell, Command (Windows), Terminal or Console applications (MacOS X) to check whether output redirection is supported or if the syntax is different.

The following example searches and processes all input files in the current directory and all directories below it recursively. The output files are located in the same directory that the command was run in, rather than in the same directories as the original input files.

```
find . -name '*.ly' -exec lilypond '{}' \;
```

This should also work for MacOS X users.

A Windows user would run

```
forfiles /s /M *.ly /c "cmd /c lilypond @file"
```

entering these commands in a command prompt usually found under Start > Accessories > Command Prompt, or by typing in the search window ‘command prompt’.

Alternatively, an explicit path to the top-level of your folder containing all the sub-folders that have input files in them can be stated using the /p option;

```
forfiles /s /p C:\Documents\MyScores /M *.ly /c "cmd /c lilypond @file"
```

If there are spaces in the path to the top-level folder, then the whole path needs to be inside double quotes;

```
forfiles /s /p "C:\Documents\My Scores" /M *.ly /c "cmd /c lilypond @file"
```

## Basic command line options for LilyPond

The following options are supported.

`-d, --define-default=var[=val]`

See [Advanced command line options for LilyPond], page 6.

`-e, --evaluate=expr`

Evaluate the Scheme *expr* before parsing any .ly files. Multiple `-e` options may be given, they are evaluated sequentially.

The expression is evaluated in the guile-user module, so if you want to use a definition like (define-public a 42) as *expr*, use

```
lilypond -e '(define-public a 42)'
```

on the command-line, and include

```
 #(use-modules (guile-user))
```

at the top of the .ly file.

**Note:** Windows users must use double quotes instead of single quotes.

`-E, --eps` Generate EPS files.

This option is equivalent to specifying `-dseparate-page-formats=eps` `-dtall-page-formats=eps`.

`-f, --format=format`

The format of the (main) output file or files. Possible values for *format* are ps, pdf, png or svg.

Example: `lilypond -fpng foo.ly`

SVG internally uses a specific backend, and therefore cannot be obtained in the same run as other formats; using `-fsvg` or `--svg` is actually equivalent to using the `-dbackend=svg` option. See [Advanced command line options for LilyPond], page 6.

`-h, --help`

Show a summary of usage.

`-H, --header=field`

Dump a header field to file `BASENAME.field`.

As an example, let's assume that you have an input file `foo.ly` containing

```
\header { title = "bar" }
\score { c1 }
```

The command

```
lilypond -H title foo.ly
```

then creates a plain text file `foo.title` containing the string bar.

`-i, --init=file`

Set init file to *file* (default: `init.ly`).

`-I, --include=directory`

Append *directory* to the search path for input files with relative paths. By default, only the current working directory gets searched.

Multiple `-I` options may be given. The search starts in the current working directory, and if the file to be included is not found the search continues in the directory given by the first `-I` option, then the directory in the second `-I` option, and so on.

**Note:** Using the tilde character (`~`) with the `-I` switch may produce unexpected results in some shells.

Windows users need to include a trailing slash for the directory's path.

`-j, --jail=user,group,jail,dir`

[This option is only available if your operating system supports the chroot functionality. In particular, Windows doesn't support it.]

Run lilypond in a chroot jail.

The `--jail` option can be used for security when LilyPond formatting is being provided via a web server, or whenever LilyPond executes commands sent by external sources (see [Advanced command line options for LilyPond], page 6). Because LilyPond provides the ability to run Guile programs, it is essential in such scenarios to run it in a sandboxed way so that the file being compiled does not wreak havoc on the system, for example with

```
% too dangerous to write correctly
#(system "rm -rf /")
% malicious but not destructive
{ c4~$(ly:gulp-file "/etc/passwd") }
```

`--jail` is one way to achieve sandboxing. Another one is running LilyPond in a Docker container.

The `--jail` option works by changing the root of lilypond to *jail* just before starting the actual compilation process. The user and group are then changed to match those provided, and the current directory is changed to *dir*. This setup guarantees that it is not possible (at least in theory) to escape from the jail. Note that for `--jail` to work, lilypond must be run as root, which is usually accomplished in a safe way using `sudo`.

Setting up a jail can be a relatively complex matter, as we must be sure that LilyPond is able to find whatever it needs to compile the source *inside* the jail itself. A typical chroot jail comprises the following steps:

#### Setting up a separate filesystem

A separate filesystem should be created for LilyPond, so that it can be mounted with safe options such as `noexec`, `nodev`, and `nosuid`. In this way, it is impossible to run executables or to write directly to a device from LilyPond. If you do not want to create a separate partition, just create a file of reasonable size and use it to mount a loop device. A separate filesystem also guarantees that LilyPond cannot write more space than it is allowed.

#### Setting up a separate user

A separate user and group (say, `lily/lily`) with low privileges should be used to run LilyPond inside the jail. There should be a single directory writable by this user, which should be passed in *dir*.

#### Preparing the jail

LilyPond needs to read a number of files while running. All these files are to be copied into the jail, under the same path they appear in the real root filesystem. The entire content of the LilyPond installation (e.g., `/usr/share/lilypond`) should be copied.

If problems arise, the simplest way to trace them down is to run LilyPond using `strace`, which allows you to determine which files are missing.

#### Running LilyPond

In a jail mounted with `noexec` it is impossible to execute any external program. Therefore LilyPond must be run with a backend that does not require any such program. As we have already mentioned, it must be run with superuser privileges (which, of course, it loses immediately), possibly using `sudo`. It is also good practice to limit the number of seconds of CPU time LilyPond can use (e.g., using `ulimit -t`), and, if your operating system supports it, the amount of memory that can be allocated. Also see [LilyPond in chroot jail], page 12.

`-l, --loglevel=level`

Set the verbosity of the console output to *level*. Possible values are:

NONE	No output at all, not even error messages.
ERROR	Only error messages, no warnings or progress messages.
WARN	Warnings and error messages, no progress.
BASIC_PROGRESS	Basic progress messages (success), warnings and errors.
PROGRESS	All progress messages, warnings and errors.

- INFO        Progress messages, warnings, errors and further execution information. This is the default.
- DEBUG       All possible messages, including verbose debug output.
- o, --output=*file*  
 -o, --output=*folder*  
       Set the default output file to *file* or, if a folder with that name exists, direct the output to *folder*, taking the file name from the input file. The appropriate suffix is added (e.g., .pdf for PDF) in both cases.
- O, --pspdfopt=*key*  
       Set the PS/PDF output optimization to *key*. Possible values are:
- size        Generate a very small PS/EPS/PDF document. This is the default.  
             Using this value is equivalent to setting LilyPond's Scheme command line options `-dmusic-font-encodings='#f'` and `-dgs-never-embed-fonts='#f'`.
- TeX         Produce files that are optimized for inclusion in pdfTeX, LuaTeX, or XeTeX documents.  
             Using this value is equivalent to setting LilyPond's Scheme command line options `-dmusic-font-encodings='#t'` and `-dgs-never-embed-fonts='#f'`.
- TeX-GS      If you want to include more than one PDF generated by LilyPond in a TeX document, use this option and postprocess the PDF generated by TeX with Ghostscript.  
             Using this value is equivalent to setting LilyPond's Scheme command line options `-dmusic-font-encodings='#t'` and `-dgs-never-embed-fonts='#t'`.
- ps        Generate PostScript. This option is equivalent to `-fps`.
- png       Generate pictures of each page, in PNG format. This option is equivalent to `-fpng`.  
             The resolution of the image may be set to *N* DPI with  
                     `-dresolution=N`
- pdf       Generate PDF. This is the default, being equivalent to `-fpdf`.
- s, --silent  
       Show no progress, only error messages. This is equivalent to `-lERROR`.
- svg       Generate SVG files for each page. This option is equivalent to `-fsvg`.
- v, --version  
       Show version information.
- V, --verbose  
       Be verbose: show full paths of all files read, give timing information, etc. It is equivalent to `-lDEBUG`.
- w, --warranty  
       Show the warranty with which GNU LilyPond comes. (It comes with **NO WARRANTY!**)



## Advanced command line options for LilyPond

Option `-d` is the command-line interface to LilyPond's Scheme function `ly:set-option`. This means that all options listed here can also be set within `.ly` files.

`-d, --define-default=option-name[=value]`

`-d, --define-default=no-option-name`

Set the equivalent internal Scheme symbol *option-name* to *value*. For example, the command-line option

`-dbackend=svg`

is equivalent to

`#(ly:set-option 'backend 'svg)`

in a LilyPond input file.

If *value* is not supplied, use `#t` as the value (which might produce strange results if the expected *value* type is not boolean). The prefix `no-` may be added to *option-name* to switch 'off' an option, providing `#f` as the value. For example,

`-dpoint-and-click='#f'`

is the same as

`-dno-point-and-click`

[Note that the `#` character introduces a comment in many shells. For this reason it is recommended to always quote expressions that contain it.]

The following table lists all supported option names together with its values. Within Scheme code, option values can be read using function `ly:get-option`.

**anti-alias-factor** *num*

Render at a higher resolution (using factor *num*, which must be a positive integer  $\leq 8$ ) and scale down the result to prevent 'jaggies' in PNG images. Default: 1.

**aux-files** *bool*

If *bool* is `#t`, create `.tex`, `.texi`, and `.count` files. This option is mostly for use by `lilypond-book`. Default: `#f`.

**backend** *symbol*

Use *symbol* as the backend for LilyPond output. Possible values are:

- |       |   |
|-------|---|
| ps    | This is the default setting. PostScript files include TTF, Type1, and OTF fonts. No 'subsetting' of these fonts is done. Be aware that using 'oriental' character sets like Japanese can lead to very large file sizes.<br><br>For PDF output, the ps backend is used, too; the resulting PS data is post-processed by Ghostscript's <code>ps2pdf</code> script, which also does font subsetting by default.  |
| cairo | This creates graphics output through the Cairo library, if support was compiled in. This backend can output ps, eps, pdf, png and svg.  |
| svg   | Scalable Vector Graphics. A single SVG file is created for every page of output. Music glyphs are encoded as vector graphics, but text fonts are <i>not</i> embedded in the SVG files. Any SVG viewer will therefore need the relevant text fonts to be available to it for proper rendering of both text and lyrics. It is recommended to not use font 'lists' or 'aliases' in case an SVG viewer is unable to handle them. When using <i>Web Open Font Format</i> (WOFF) files the additional <code>-dsvg-woff</code> switch is required. |

`clip-systems` *bool*

If *bool* is `#t`, extract music fragments out of a score. This requires that the `clip-regions` function has been defined within the `\layout` block. See Section “Extracting fragments of music” in *Notation Reference*. No fragments are extracted though if used with the `-dno-print-pages` option. Default: `#f`.

`compile-scheme-code` *bool*

Use the Guile compiler to run Scheme code, instead of the evaluator. For more information, see Section “Debugging Scheme code” in *Extending*.

`crop` *bool*

If *bool* is `#t`, a second PDF file gets created (with extension `.cropped.pdf`), together with a rendered image of it (with extension `.cropped.png`). This output file fits all the music and headers, without margins, into a single, possibly tall page. If option `--svg` is set, an additional SVG file (with extension `.cropped.svg`) is produced instead. If option `--eps` or `--ps` is set, a cropped EPS file (with extension `.cropped.eps`) is produced instead of a cropped PDF. Default: `#f`.

Note that currently this option is not well suited for multi-system output since vertical space between systems gets removed.

`datadir` Prefix for data files. This is a read-only option; setting it has no effect.

`debug-eval` *bool*

If *bool* is `#t`, use the debugging Scheme evaluator, which prints backtraces with line numbers on errors. Default: `#f`, or `#t` when using `--verbose`.

`debug-skylines` *bool*

If *bool* is `#t`, debug skylines. Default: `#f`.

`delete-intermediate-files` *bool*

If *bool* is `#t`, delete the unusable, intermediate `.ps` files created during compilation. Default: `#t`.

`embed-source-code` *bool*

If *bool* is `#t`, embed the LilyPond source files inside the generated PDF document. Default: `#f`.

`eps-box-padding` *num*

Pad left edge of the output EPS bounding box by *num* millimeters. Default: `#f` (meaning no bounding box padding).

`font-export-dir` *string*

Set directory for exporting fonts as PostScript files to *string*. This is useful when you want to create a PDF without embedded fonts first and later embed the fonts with Ghostscript as shown below.

```
$ lilypond -dfont-export-dir=fontdir -dgs-never-embed-fonts foo.ly
$ gs -q -dBATCH -dNOPAUSE -sDEVICE=pdfwrite \
  -sOutputFile=foo.embedded.pdf foo.pdf fontdir/*.font.ps
```

Note: Unlike `font-ps-resdir`, this method cannot embed CID fonts with Ghostscript 9.26 and later.

Note: Same as `font-ps-resdir`, this option skips TrueType fonts because embedding TrueType fonts later causes garbled characters. To avoid garbling characters, use `gs-never-embed-fonts`, as this embeds TrueType fonts despite its name.

Default: `#f` (meaning not to export).

**font-ps-resdir** *string*

Set directory (as *string*) to build a subset of the PostScript resource directory to be used for embedding fonts later. This is useful when you want to create a PDF without embedded fonts first and later embed the fonts with Ghostscript as shown below.

```
$ lilypond -dfont-ps-resdir=resdir -dgs-never-embed-fonts foo.ly
$ gs -q -dBATCH -dNOPAUSE -sDEVICE=pdfwrite \
  -I resdir -I resdir/Font \
  -sOutputFile=foo.embedded.pdf foo.pdf
```

Note: It is better not to specify the directory that contains the name Resource because it has a special meaning when specified with the `-I` option for Ghostscript.

Note: Unlike `font-export-dir`, this method can embed CID fonts with Ghostscript 9.26 and later.

Note: Same as `font-export-dir`, this option skips TrueType fonts because embedding TrueType fonts later causes garbled characters. To avoid garbling characters, use `gs-never-embed-fonts`, as this embeds TrueType fonts despite its name.

Default: `#f` (meaning not to build).

**gs-load-fonts** *bool*

If *bool* is `#t`, load fonts via Ghostscript. This option makes LilyPond's output files contain only references to all fonts, which must be resolved to real fonts in a post-processing step by Ghostscript. Default: `#f`.

**gs-load-lily-fonts** *bool*

If *bool* is `#t`, load LilyPond fonts via Ghostscript. This option makes LilyPond's output files contain only references to its music fonts, which must be resolved to real fonts in a post-processing step by Ghostscript. All other fonts are still output as usual. Default: `#f`.

**gs-never-embed-fonts** *bool*

If *bool* is `#t`, make Ghostscript embed only TrueType fonts and no other font format. Default: `#f`.

**help** *bool* If *bool* is `#t`, show this help. Default: `#f`.

**include-book-title-preview** *bool*

If *bool* is `#t`, include book titles in preview images. Default: `#t`.

**include-eps-fonts** *bool*

If *bool* is `#t`, include fonts in separate-system EPS files. Default: `#t`.

**include-settings** *string*

Include file *string* for global settings, which is included before the score is processed. Default: `#f` (meaning no global settings file).

**job-count** *num*

Process in parallel, using *num* jobs. Default: `#f` (meaning no parallel processing).

**log-file** *string*

Redirect output to the log file *string*.log. Default: `#f` (meaning no log file).

**max-markup-depth** *num*

Set maximum depth for the markup tree to value *num*. If a markup has more levels, assume it will not terminate on its own, print a warning, and return a null markup instead. Default: 1024.

**midi-extension** *string*

Set the default file extension for MIDI output files to *string*. Default: "midi".

`music-strings-to-paths` *bool*

If *bool* is `#t`, convert text strings to paths when glyphs belong to a music font.  
Default: `#f`.

`paper-size` *extra-quoted-string*

Set default paper size to *extra-quoted-string*. Note that the string must be enclosed in escaped double quotes. Default: `"\a4\"`.

`pixmap-format` *symbol*

Set Ghostscript's output format for pixel images to *symbol*. Default: `png16m`.

`png-width` *width*

`png-height` *height*

For PNG output, set the width and height (in pixels) of the created image file. If one of the options is missing, the other dimension is computed according to the EPS bounding box, retaining the aspect ratio.

In addition to `--png`, either `--eps`, `-dcrop`, or `-dpreview` should be used to get proper image scaling without clipping.

Option `-dresolution` is ignored.

Note that there is a bug in ghostscript versions up to 9.52 for these two options: It produces empty PNG images if the height is larger than the width.

`point-and-click` *bool*

If *bool* is `#t`, add 'point & click' links to PDF and SVG output. See Section 4.1 [Point and click], page 43. Default: `#t`.

`preview` *bool*

If *bool* is `#t`, create preview images in addition to normal output. Default: `#f`.

For input file name *file* and output format *fmt*, it generates an output file having the name *file.preview.fmt*, containing the titles and the first system of music. If `\book` or `\bookpart` blocks are used, the titles of `\book`, `\bookpart` or `\score` will appear in the output, including the first system of every `\score` block if the `\paper` variable `print-all-headers` is set to `#t`.

To suppress the usual output, use the `-dprint-pages` or `-dno-print-pages` options according to your requirements.

`print-pages` *bool*

If *bool* is `#t`, generate full pages. Default: `#t`.

Option `-dno-print-pages` is useful in combination with `-dpreview` or `-dcrop`.

`protected-scheme-parsing` *bool*

If *bool* is `#t`, continue when errors in inline Scheme code are caught in the parser. If set to `#f`, halt on errors and print a stack trace. Default: `#t`.

`relative-includes` *bool*

When processing an `\include` command, look for the included file relative to the current file if *bool* is `#t`. If set to `#f`, look for the file relative to the root file. Default: `#t`.

`resolution` *num*

Set resolution for generating PNG pixmaps to *num* dpi. Default: 101.

`separate-log-files` *bool*

For input files *file1.ly*, *file2.ly*, ..., output log data to files *file1.log*, *file2.log*, ..., if *bool* is `#t`. Default: `#f`.

`separate-page-formats` *symbol*

Comma-separated list of formats (svg, pdf, png, or eps) to use for the separate page images in lilypond-book.

`show-available-fonts` *bool*

If *bool* is #t, list available font names as delivered by the fontconfig library. Appended to this list LilyPond displays the configuration settings of fontconfig itself. Default: #f.

`strip-output-dir` *bool*

If *bool* is #t, don't use the directory part from input file paths while constructing output file names. Default: #t.

`strokeadjust` *bool*

If *bool* is #t, force PostScript stroke adjustment. This option is mostly relevant when a PDF is generated from PostScript output (stroke adjustment is usually enabled automatically for low-resolution bitmap devices). Without this option, PDF previewers tend to produce widely inconsistent stem widths at resolutions typical for screen display. However, the option does not noticeably affect print quality and causes large file size increases in PDF files. Default: #f.

`svg-woff` *bool*

This option is required when using Web Open Font Format (WOFF) font files with the svg backend. If *bool* is #t, a single SVG file is created for every page of output. Apart from LilyPond's own music glyphs, no other font information will be included. Any SVG viewer will therefore require the fonts be available to it for the proper rendering of both text and lyrics. It is also recommended not to use any font 'aliases' or 'lists' in case the SVG viewer cannot handle them. Default: #f.

`tall-page-formats` *symbol*

Comma-separated list of formats (svg, pdf, png, or eps) to use for the 'tall page' image in lilypond-book.

`use-paper-size-for-page` *bool*

If *bool* is #t (the default), each page is set to the paper size, possibly cropping parts that extend beyond the paper. Setting it #f will resize the page to contain the content as necessary.

`verbose` Verboosity level. This is a read-only option; setting it has no effect.

`warning-as-error` *bool*

If *bool* is #t, change all warning and 'programming error' messages into errors. Default: #f.

## Environment variables

lilypond recognizes the following environment variables:

`LILYPOND_DATADIR`

This specifies a directory where locale messages and data files are looked up by default, overriding locations defined either at compile-time or computed dynamically at run-time (see [Relocation], page 11). The directory should contain subdirectories called ly, ps, tex, etc.

`LILYPOND_LOCALEDIR`

Specify the directory where locale-specific files are located. This overrides the value derived from `LILYPOND_DATADIR`.

**LILYPOND\_RELOCDIR**

Specify the directory where relocation files are located. This overrides the value derived from the location of the lilypond binary.

**LANG**

The language for LilyPond data sent to stdout and stderr, for example progress reports, warning messages, or debug output. Example: LANG=de.

**LILYPOND\_LOGLEVEL**

The default loglevel. If LilyPond is called without an explicit loglevel (i.e., no `--loglevel` command line option), this value is used.

**LILYPOND\_GC\_YIELD**

A variable, as a percentage, that tunes memory management behavior. A higher values means the program uses more memory, a smaller value means more CPU time is used. The default value is 70.

**TMPDIR**

This specifies the temporary directory in GNU/Linux and Mac. Default is /tmp. It is the directory where intermediate files (such as PostScript files) are saved during compilation. Overriding this variable might be useful, for example, if the user running lilypond does not have write access to the default temporary directory. Example: TMPDIR=~/.foo.

## Relocation

Most programs in the Unix world use default directories for its data that are determined at configure time before compilation. LilyPond is no exception; for example, a typical installation puts the lilypond binary into /usr/bin and all files specific to LilyPond into subdirectories of /usr/share/lilypond/2.21.0/ (assuming that the current version is 2.21.0).

While this approach works fine for manual compilation and platforms that come with standardized package managers, it can cause issues where such managers are not common or not used by default. Typical examples of such platforms are Windows and MacOS, where users expect that application bundles can be installed anywhere.

The common solution to this problem is relocation support: Instead of using hard-coded paths to data files, locations of the necessary support files are computed at run time *relative to the executed binary*.

## Relocation files

There's actually a second mechanism for run-time configuration: LilyPond heavily relies on external programs and libraries, in particular the 'FontConfig' and 'GUILE' libraries to find system fonts and handle Scheme files, respectively, and the gs program to convert PS data to PDF files. All of them must be configured also to locate its relevant data files. To do that, the lilypond program parses all files in a directory called relocate (if it exists; see below where this directory is searched for) to manipulate environment variables, which in turn control those external libraries and programs. The format of such relocation files is simple; each line has the syntax

*command key=value*

and empty lines get ignored.

The *command* directive is one of the following.

**set**

Unconditionally set environment variable *key* to *value*. This overrides a previously set value.

**set?**

Set environment variable *key* to *value* only if *key* isn't defined yet. In other words, it doesn't override a previously set value.

**setdir**      If *value* is a directory, unconditionally set environment variable *key* to *value*. Otherwise, emit a warning.

**setfile**      If *value* is a file, unconditionally set environment variable *key* to *value*. Otherwise, emit a warning.

**prependdir**  
                 Prepend directory *value* to the list of directories in environment variable *key*. If *key* doesn't exist it gets created.

Environment variables (marked with a leading dollar sign) are allowed in *value* and get expanded before the directive is executed.

Here are two examples of relocation file entries.

```
set? FONTCONFIG_FILE=$INSTALLER_PREFIX/etc/fonts/fonts.conf
prependdir GUILE_LOAD_PATH=$INSTALLER_PREFIX/share/guile/1.8
```

Multiple lines setting the same environment variable should be avoided in relocation files since the parsing order of files in the relocate directory is arbitrary.

## Relocation algorithm

LilyPond uses the following algorithm to find its data files.

1. Compute the directory where the currently executed lilypond binary is located. Let's call this *bindir*. Set (internal) environment variable `INSTALLER_PREFIX` to *bindir*/.. (i.e., the parent directory of *bindir*).
2. Check environment variable `LILYPOND_DATADIR`. If it is set, use its value for LilyPond's data directory, *datadir*. Otherwise use either `$INSTALLER_PREFIX/share/lilypond/version` (with *version* being the current LilyPond version) or `$INSTALLER_PREFIX/share/lilypond/current`.
3. Check environment variable `LILYPOND_LOCALEDIR`. If it is set, use its value for LilyPond's locale data directory, *localedir*. Otherwise use `$INSTALLER_PREFIX/share/locale`.
4. Check environment variable `LILYPOND_RELOCDIR`. If it is set, use its value for the directory of LilyPond's relocation files, *reloaddir*. Otherwise use `$INSTALLER_PREFIX/etc/relocate`.
5. If *datadir* doesn't exist, use a compile-time value instead. Ditto for *localedir* (but not for *reloaddir*, since it doesn't make sense to have that).
6. If *reloaddir* exists, process all files in this directory as described in [Relocation files], page 11.

## LilyPond in chroot jail

Setting up the server to run LilyPond in a chroot jail is a complicated task. The steps are listed below. Examples in the steps are from Ubuntu GNU/Linux, and may require the use of `sudo` as appropriate.

- Install the necessary packages: LilyPond, Ghostscript, and ImageMagick.
- Create a new user by the name of *lily*:

```
adduser lily
```

This will create a new group for the *lily* user as well, and a home folder, `/home/lily`

- In the home folder of the *lily* user create a file to use as a separate filesystem:

```
dd if=/dev/zero of=/home/lily/loopfile bs=1k count= 200000
```

This example creates a 200MB file for use as the jail filesystem.

- Create a loop device, make a file system and mount it, then create a folder that can be written by the *lily* user:

```
mkdir /mnt/lilyloop
```

```
losetup /dev/loop0 /home/lily/loopfile
mkfs -t ext3 /dev/loop0 200000
mount -t ext3 /dev/loop0 /mnt/lilyloop
mkdir /mnt/lilyloop/lilyhome
chown lily /mnt/lilyloop/lilyhome
```

- In the configuration of the servers, the JAIL will be /mnt/lilyloop and the DIR will be /lilyhome.
- Create a big directory tree in the jail by copying the necessary files, as shown in the sample script below.

You can use sed to create the necessary copy commands for a given executable:

```
for i in "/usr/local/lilypond/usr/bin/lilypond" "/bin/sh" "/usr/bin/"; \
do ldd $i | sed 's/.*=> \/(.*\//)\([^()]*\).*/mkdir -p \1 \&\& \
cp -L \/\1\2 \1\2/' | sed 's/\t\//\(.*\//)\(.*) (.*$)/mkdir -p \
\1 \&\& cp -L \/\1\2 \1\2/' | sed '/.*=>.*d'; done
```

### Example script for 32-bit Ubuntu 8.04

```
#!/bin/sh
## defaults set here

username=lily
home=/home
loopdevice=/dev/loop0
jaildir=/mnt/lilyloop
# the prefix (without the leading slash!)
lilyprefix=usr/local
# the directory where lilypond is installed on the system
lilydir=$lilyprefix/lilypond/

userhome=$home/$username
loopfile=$userhome/loopfile
adduser $username
dd if=/dev/zero of=$loopfile bs=1k count=200000
mkdir $jaildir
losetup $loopdevice $loopfile
mkfs -t ext3 $loopdevice 200000
mount -t ext3 $loopdevice $jaildir
mkdir $jaildir/lilyhome
chown $username $jaildir/lilyhome
cd $jaildir

mkdir -p bin usr/bin usr/share usr/lib usr/share/fonts $lilyprefix tmp
chmod a+w tmp

cp -r -L $lilydir $lilyprefix
cp -L /bin/sh /bin/rm bin
cp -L /usr/bin/convert /usr/bin/gs usr/bin
cp -L /usr/share/fonts/truetype usr/share/fonts

# Now the library copying magic
for i in "$lilydir/usr/bin/lilypond" "$lilydir/usr/bin/guile" "/bin/sh" \
"/bin/rm" "/usr/bin/gs" "/usr/bin/convert"; do ldd $i | sed 's/.*=> \
```



```

\(\.*\)\(\[^\]*\).*\mkdir -p \1 \&\& cp -L \/\1\2 \1\2/' | sed \
's/\t\(\.*\)\(\[^\]*\).*\ (\.*)$/mkdir -p \1 \&\& cp -L \/\1\2 \1\2/' \
| sed '/.*=>.*\d'; done | sh -s

# The shared files for Ghostscript...
cp -L -r /usr/share/ghostscript usr/share
# The shared files for ImageMagick
cp -L -r /usr/lib/ImageMagick* usr/lib

### Now, assuming that you have test.ly in /mnt/lilyloop/lilyhome,
### you should be able to run:
### Note that /$lilyprefix/bin/lilypond is a script, which sets the
### LD_LIBRARY_PATH - this is crucial
/$lilyprefix/bin/lilypond -jlily,lily,/mnt/lilyloop,/lilyhome test.ly

```

### 1.3 Error messages

Different error messages can appear while compiling a file:

*Warning*     Something looks suspect. If you are requesting something out of the ordinary then you will understand the message, and can ignore it. However, warnings usually indicate that something is wrong with the input file.

*Error*        Something is definitely wrong. The current processing step (parsing, interpreting, or formatting) will be finished, but the next step will be skipped.

*Fatal error*     Something is definitely wrong, and LilyPond cannot continue. This happens rarely. The most usual cause is misinstalled fonts.

*Scheme error*     Errors that occur while executing Scheme code are caught by the Scheme interpreter. If running with the verbose option (-V or --verbose) then a call trace of the offending function call is printed.

*Programming error*     There was some internal inconsistency. These error messages are intended to help the programmers and debuggers. Usually, they can be ignored. Sometimes, they come in such big quantities that they obscure other output.

*Aborted (core dumped)*     This signals a serious programming error that caused the program to crash. Such errors are considered critical. If you stumble on one, send a bug-report.

If warnings and errors can be linked to some part of the input file, then error messages have the following form

```

filename:lineno:columnno: message
offending input line

```

A line-break is inserted in the offending line to indicate the column where the error was found. For example,

```

test.ly:2:19: error: not a duration: 5
{ c'4 e'
      5 g' }

```

These locations are LilyPond's best guess about where the warning or error occurred, but (by their very nature) warnings and errors occur when something unexpected happens. If you

can't see an error in the indicated line of your input file, try checking one or two lines above the indicated position.

Please note that diagnostics can be triggered at any point during the many stages of processing. For example if there are parts of the input that are processed multiple times (i.e., in midi and layout output), or if the same music variable is used in multiple contexts the same message may appear several times. Diagnostics produced at a 'late' stage (i.e., bar checks) might also be issued multiple times.

More information about errors is given in Section 1.4 [Common errors], page 15.

## 1.4 Common errors

The error conditions described below occur often, yet the cause is not obvious or easily found. Once seen and understood, they are easily handled.

### Music runs off the page

Music running off the page over the right margin or appearing unduly compressed is almost always due to entering an incorrect duration on a note, causing the final note in a measure to extend over the bar line. It is not invalid if the final note in a measure does not end on the automatically entered bar line, as the note is simply assumed to carry over into the next measure. But if a long sequence of such carry-over measures occurs the music can appear compressed or may flow off the page because automatic line breaks can be inserted only at the end of complete measures, i.e., where all notes end before or at the end of the measure.

**Note:** An incorrect duration can cause line breaks to be inhibited, leading to a line of highly compressed music or music which flows off the page.


The incorrect duration can be found easily if bar checks are used, see Section “Bar and bar number checks” in *Notation Reference*.

If you actually intend to have a series of such carry-over measures you will need to insert an invisible bar line where you want the line to break. For details, see Section “Bar lines” in *Notation Reference*.

### An extra staff appears

If contexts are not created explicitly with `\new` or `\context`, they will be silently created as soon as a command is encountered which cannot be applied to an existing context. In simple scores the automatic creation of contexts is useful, and most of the examples in the LilyPond manuals take advantage of this simplification. But occasionally the silent creation of contexts can give rise to unexpected new staves or scores. For example, it might be expected that the following code would cause all note heads within the following staff to be colored red, but in fact it results in two staves with the note heads remaining the default black in the lower staff.

```
\override Staff.NoteHead.color = #red
\new Staff { a' }
```



This is because a `Staff` context does not exist when the override is processed, so one is implicitly created and the override is applied to it, but then the `\new Staff` command creates another, separate, staff into which the notes are placed. The correct code to color all note heads red is

```
\new Staff {
  \override Staff.NoteHead.color = #red
  a'
}
```



## Error message Unbound variable %

This error message will appear at the bottom of the console output or log file together with a “GUILE signalled an error ...” message every time a Scheme routine is called which (invalidly) contains a *LilyPond* rather than a *Scheme* comment.

LilyPond comments begin with a percent sign, (%), and must not be used within Scheme routines. Scheme comments begin with a semi-colon, (;).

## Error message FT\_Get\_Glyph\_Name

This error messages appears in the console output or log file if an input file contains a non-ASCII character and was not saved in UTF-8 encoding. For details, see Section “Text encoding” in *Notation Reference*.

## Warning staff affinities should only decrease

This warning can appear if there are no staves in the printed output, for example if there are just a `ChordName` context and a `Lyrics` context as in a lead sheet. The warning messages can be avoided by making one of the contexts behave as a staff by inserting

```
\override VerticalAxisGroup.staff-affinity = ##f
```

at its start. For details, see “Spacing of non-staff lines” in Section “Flexible vertical spacing within systems” in *Notation Reference*.

## Error message unexpected \new

A `\score` block must contain a *single* music expression. If instead it contains several `\new Staff`, `\new StaffGroup` or similar contexts introduced with `\new` without them being enclosed in either curly brackets, { ... }, or double angle brackets, << ... >>, like this:

```
\score {
  % Invalid! Generates error: syntax error, unexpected \new
  \new Staff { ... }
  \new Staff { ... }
}
```

the error message will be produced.

To avoid the error, enclose all the `\new` statements in curly or double angle brackets.


Using curly brackets will introduce the `\new` statements sequentially:

```
\score {
  {
    \new Staff { a' a' a' a' }
    \new Staff { g' g' g' g' }
```



but more likely you should be using double angle brackets so the new staves are introduced in parallel, i.e., simultaneously:

```
\score {
  <<
    \new Staff { a' a' a' a' }
    \new Staff { g' g' g' g' }
  >>
}
```



### Warning this voice needs a `\voiceXx` or `\shiftXx` setting

If notes from two different voices with stems in the same direction occur at the same musical moment, but the voices have no voice-specific shifts specified, the warning message ‘warning: this voice needs a `\voiceXx` or `\shiftXx` setting’ will appear when compiling the LilyPond file. This warning will appear even when the notes have no visible stems, e.g., whole notes, if the stems for shorter notes at the same pitch would be in the same direction.

Remember that the stem direction depends on the position of the note on the staff unless the stem direction is specified, for example by using `\voiceOne`, etc. In this case the warning will appear only when the stems happen to be in the same direction, i.e., when the notes are in the same half of the staff.

By placing the notes in voices with stem directions and shifts specified, for example by using `\voiceOne`, etc., these warnings may be avoided.

Notes in higher numbered voices, `\voiceThree`, etc., are automatically shifted to avoid clashing note columns. This causes a visible shift for notes with stems, but whole notes are not visibly shifted unless an actual clash of the note heads occurs, or when the voices cross over from their natural order (when `\voiceThree` is higher than `\voiceOne`, etc.).

### See also

Section “Explicitly instantiating voices” in *Learning Manual*, Section “Real music example” in *Learning Manual*, Section “Single-staff polyphony” in *Notation Reference*, Section “Collision resolution” in *Notation Reference*.

## 2 Updating files with `convert-ly`

As LilyPond is improved, the syntax (input language) of some commands and functions can change. This can result in unexpected errors, warnings or even wrong output when input files, previously created for older versions of LilyPond are then used with later versions.

To help with this the `convert-ly` command can be used to upgrade these older input files to use the newer syntax.

### 2.1 Why does the syntax change?

Often, syntax changes are made to make the input simpler to both read and write, but occasionally the changes are made to accommodate new features or enhancements to existing functions.

To illustrate this here is a real example:

All `\paper` and `\layout` property names were supposed to be written in the form first-second-third. However, in LilyPond version 2.11.60, it was noticed that the `printallheaders` property did not follow this convention. Should this property be left alone (confusing new users with an inconsistent format)? Or should it be changed (annoying old users with existing LilyPond input files)?

The decision was made to change the name of the property to `print-all-headers`, and by using the `convert-ly` command the old users had a way to automatically update their existing input files.

However, the `convert-ly` command cannot always be used to manage all syntax changes. In versions of LilyPond before 2.4.2, accents and non-English characters were entered using standard LaTeX notation. For example the French word for ‘Christmas’ was entered as `No\"e1`. But in LilyPond 2.6 onwards, the special `ë` must be entered directly as a UTF-8 character. The `convert-ly` command cannot change LaTeX special characters into UTF-8 characters, so older LilyPond input files have to be edited manually.

The conversion rules of the `convert-ly` command work using text pattern-matching and replacement (rather than ‘understanding’ the context of what it is changing within a given input file). This has several consequences:

- The reliability of the conversion depends on the quality of each applied rule set and on the complexity of the respective change. Sometimes conversions may require additional, manual fixes, so the original input files should be kept for comparison just in case.
- Only conversions to newer syntax changes are possible: there are no rule sets to go back to older versions of LilyPond. So the input file should only be upgraded when older versions of LilyPond are no longer being maintained. Again, the original input files should be kept just in case; perhaps using version control systems (i.e. Git) to help with maintaining multiple versions of your input files.
- LilyPond is quite robust when processing ‘creatively’ placed or omitted whitespace, but the rules used by `convert-ly` often make some stylistic assumptions. Therefore following the input style as used in the LilyPond manuals is advised for painless upgrades, particularly as the examples in the manuals themselves are all upgraded using the `convert-ly` command.

### 2.2 Invoking `convert-ly`

The `convert-ly` command uses the `\version` number in the input file to detect older versions. In most cases, to upgrade your input file it is sufficient just to run;

```
convert-ly -e myfile.ly
```

in the directory containing the input file. This will upgrade `myfile.ly` in-place and preserve the original file by renaming it `myfile.ly~`. The `\version` number in the upgraded input file, along with any required syntax updates, is also changed.

When run, the `convert-ly` command will output the version numbers of which conversions have been made to. If no version numbers are listed in the output for the file, it is already up to date and using the latest LilyPond syntax.

**Note:** For each new version of LilyPond, a new `convert-ly` command is created, however not every version of LilyPond will need syntax changes for its input files from the version before. This means that the `convert-ly` command will only convert input files up to the latest syntax change it has and this, in turn, may mean that the `\version` number left in the upgraded input file is sometimes earlier than the version of `convert-ly` command itself.

To convert all input files in a single directory use;

```
convert-ly -e *.ly
```

Linux and MacOS X users can both use the appropriate terminal application, but MacOS X users can also execute this command directly under the menu entry `Compile > Update syntax`.

A Windows user would run the command;

```
convert-ly.py -e *.ly
```

entering these commands in a command prompt usually found under `Start > Accessories > Command Prompt` or for version 8 users, by typing in the search window ‘command prompt’.

To convert all input files that reside in different sets of subdirectories;

```
find . -name '*.ly' -exec convert-ly -e '{}' \;
```

This example searches and converts all input files in the current directory and all directories below it recursively. The converted files will be located in the same directory along with their renamed originals. This should also work for MacOS X users, although only via the terminal app.

Windows user would use;

```
forfiles /s /M *.ly /c "cmd /c convert-ly.py -e @file"
```

Alternatively, an explicit path to the top-level of your folder containing all the sub-folders that have input files in them can be stated using the `/p` option;

```
forfiles /s /p C:\Documents\MyScores /M *.ly /c "cmd /c convert-ly.py -e @file"
```

If there are spaces in the path to the top-level folder, then the whole path needs to be inside double quotes;

```
forfiles /s /p "C:\Documents\My Scores" /M *.ly /c "cmd /c convert-ly.py -e @file"
```

## 2.3 Command line options for convert-ly

The program is invoked as follows:

```
convert-ly [option]... filename...
```

The following options can be given:

`-d, --diff-version-update`

increase the `\version` string only if the file has actually been changed. In that case, the version header will correspond to the version after the last actual change. An unstable version number will be rounded up to the next stable version number unless that would exceed the target version number. Without this option, the version will instead reflect the last *attempted* conversion.

`-e, --edit`

Apply the conversions direct to the input file, modifying it in-place. The original file is renamed as `myfile.ly~`. This backup file may be a hidden file on some operating systems. Alternatively, if you want to specify a different name for the upgraded file without using the `-e` options default `~` appended to the old input file, the output can be redirected instead;

```
convert-ly myfile.ly > mynewfile.ly
```

Windows user would use;

```
convert-ly.py myfile.ly > mynewfile.ly
```

`-b, --backup-numbered`

When used with the `'-e'` option, number the backup files so that no previous version is overwritten. The backup files may be hidden on some operating systems.

`-f, --from=from-patchlevel`

Set the version to convert from. If this is not set, `convert-ly` will guess this, on the basis of `\version` strings in the file. E.g. `--from=2.10.25`

`-h, --help`

Print usage help.

`-l loglevel, --loglevel=loglevel`

Set the output verbosity to *loglevel*. Possible values, in upper case, are PROGRESS (the default), NONE, WARNING, ERROR and DEBUG.

`-n, --no-version`

Normally, `convert-ly` adds a `\version` indicator to the output. Specifying this option suppresses this.

`-s, --show-rules`

Show all known conversions and exit.

`-t, --to=to-patchlevel`

Explicitly set which `\version` to convert to, otherwise the default is the most current value. It must be higher than the starting version.

```
convert-ly --to=2.14.1 myfile.ly
```

To upgrade LilyPond fragments in texinfo files, use

```
convert-ly --from=... --to=... --no-version *.itely
```

To see the changes in the LilyPond syntax between two versions, use

```
convert-ly --from=... --to=... -s
```

## 2.4 Problems running `convert-ly`

When running `convert-ly` in a Command Prompt window under Windows on a file which has spaces in the filename or in the path to it, it is necessary to surround the entire input file name with three (!) sets of double quotes:

```
convert-ly """"D:/My Scores/Ode.ly"""" > "D:/My Scores/new Ode.ly"
```

If the simple `convert-ly -e *.ly` command fails because the expanded command line becomes too long, the `convert-ly` command may be placed in a loop instead. This example for UNIX will upgrade all `.ly` files in the current directory

```
for f in *.ly; do convert-ly -e $f; done;
```

In the Windows Command Prompt window the corresponding command is

```
for %x in (*.ly) do convert-ly -e """"%x""""
```

Not all language changes are handled. Only one output option can be specified. Automatically updating scheme and LilyPond scheme interfaces is quite unlikely; be prepared to tweak scheme code manually.

## 2.5 Manual conversions

In theory, a program like convert-ly could handle any syntax change. After all, a computer program interprets the old version and the new version, so another computer program can translate one file into another<sup>1</sup>.

However, the LilyPond project has limited resources: not all conversions are performed automatically. Below is a list of known problems.

1.6->2.0:

Doesn't always convert figured bass correctly, specifically things like {<>}. Mats' comment on working around this:

To be able to run convert-ly on it, I first replaced all occurrences of '{<' to some dummy like '#{#' and similarly I replaced '>}' with '&}''. After the conversion, I could then change back from '{ #' to '{ <' and from '& }' to '> }'.

Doesn't convert all text markup correctly. In the old markup syntax, it was possible to group a number of markup commands together within parentheses, e.g.

```
-#((bold italic) "string")
```

This will incorrectly be converted into

```
-\markup{{\bold italic} "string"}
```

instead of the correct

```
-\markup{\bold \italic "string"}
```

2.0->2.2:

Doesn't handle \partCombine

Doesn't do \addlyrics => \lyricsto, this breaks some scores with multiple stanzas.

2.0->2.4:

\magnify isn't changed to \fontsize.

```
- \magnify #m => \fontsize #f, where f = 6ln(m)/ln(2)
```

remove-tag isn't changed.

```
- \applyMusic #(remove-tag '. . .) => \keepWithTag #' . . .
```

first-page-number isn't changed.

```
- first-page-number no => print-first-page-number = ##f
```

Line breaks in header strings aren't converted.

```
- \\\ as line break in \header strings => \markup \center-align <
  "First Line" "Second Line" >
```

Crescendo and decrescendo terminators aren't converted.

```
- \rced => \!
```

```
- \rc => \!
```

2.2->2.4:

\turnOff (used in \set Staff.VoltaBracket = \turnOff) is not properly converted.

2.4.2->2.5.9

\markup{ \center-align <{ ... }> } should be converted to:

---

<sup>1</sup> At least, this is possible in any LilyPond file which does not contain scheme. If there is scheme in the file, then the LilyPond file contains a Turing-complete language, and we run into problems with the famous “Halting Problem” in computer science.



```
\markup{ \center-align {\line { ... }} }
but now, \line is missing.
2.4->2.6
Special LaTeX characters such as $~$ in text are not converted to UTF8.
2.8
\score{} must now begin with a music expression. Anything else
(particularly \header{}) must come after the music.
```

## 2.6 Writing code to support multiple versions

In some cases, especially when writing *library* code it is desirable to support multiple LilyPond versions across breaking syntax changes. To do this alternative portions of code can be wrapped into conditional expressions depending on the currently executed LilyPond version. The Scheme function `ly:version?` expects a comparison operator *op* and a reference version *ver* passed as a list of integers with up to three elements. Missing elements are ignored so `'(2 20)` is equivalent to *any* version of the 2.20 line of versions. Constructs like the following are possible:

```
#(cond
  ((ly:version? > '(2 20))
   (ly:message "This is code to run for LilyPond after 2.20"))
  ((ly:version? = '(2 19 57))
   (ly:message "This will only be executed with LilyPond 2.19.57"))
  (else (ly:message "This will be executed in any other version")))
```

Usually this will be integrated in library functions to allow alternative syntax to be used, but it is also possible to use the comparison directly within the music like in the following example:

```
{
  c' d' e' f'
  #(if (ly:version? = '(2 21))
      #{ \override NoteHead.color = #red #}
      #{ \override NoteHead.color = #blue #})
  g' a' b' c'
}
```

**Note:** This function has been introduced in LilyPond 2.21.80, so it is not possible to compare with versions earlier than that.

## 3 Running lilypond-book

If you want to add pictures of music to a document, you can simply do it the way you would do with other types of pictures. The pictures are created separately, yielding PostScript output or PNG images, and those are included into a  $\text{\LaTeX}$  or HTML document.

`lilypond-book` provides a way to automate this process: This program extracts snippets of music from your document, runs `lilypond` on them, and outputs the document with pictures substituted for the music. The line width and font size definitions for the music are adjusted to match the layout of your document.

This is a separate program from `lilypond` itself, and is run on the command line; for more information, see Section 1.2 [Command-line usage], page 1.

This procedure may be applied to  $\text{\LaTeX}$ , HTML, Texinfo or DocBook documents.

### 3.1 An example of a musicological document

Some texts contain music examples. These texts are musicological treatises, songbooks, or manuals like this. Such texts can be made by hand, simply by importing a PostScript figure into the word processor. However, there is an automated procedure to reduce the amount of work involved in HTML,  $\text{\LaTeX}$ , Texinfo and DocBook documents.

A script called `lilypond-book` will extract the music fragments, format them, and put back the resulting notation. Here we show a small example for use with  $\text{\LaTeX}$ . The example also contains explanatory text, so we will not comment on it further.

#### Input

```
\documentclass[a4paper]{article}
```

```
\begin{document}
```

Documents for `\verb+lilypond-book+` may freely mix music and text.  
For example,

```
\begin{lilypond}
\relative {
  c'2 e2 \tuplet 3/2 { f8 a b } a2 e4
}
\end{lilypond}
```

Options are put in brackets.

```
\begin{lilypond}[fragment,quote,staffsize=26,verbatim]
  c'4 f16
\end{lilypond}
```

Larger examples can be put into a separate file, and introduced with  
`\verb+lilypondfile+`.

```
\lilypondfile[quote,noindent]{screech-and-boink.ly}
```

(If needed, replace `@file{screech-and-boink.ly}` by any `@file{.ly}` file  
you put in the same directory as this file.)

```
\end{document}
```

## Processing

Save the code above to a file called `lilybook.lytex`, then in a terminal run

```
lilypond-book --output=out --pdf lilybook.lytex
lilypond-book (GNU LilyPond) 2.24.2
Reading lilybook.lytex...
...lots of stuff deleted...
Compiling lilybook.tex...
cd out
pdflatex lilybook
...lots of stuff deleted...
xpdf lilybook
(replace xpdf by your favorite PDF viewer)
```

Running `lilypond-book` and `latex` creates a lot of temporary files, which would clutter up the working directory. To remedy this, use the `--output=dir` option. It will create the files in a separate subdirectory `dir`.

Finally the result of the  $\text{\LaTeX}$  example shown above.<sup>1</sup> This finishes the tutorial section.

---

<sup>1</sup> This tutorial is processed with `Texinfo`, so the example gives slightly different results in layout.

## Output

Documents for lilypond-book may freely mix music and text. Using Texinfo syntax, this example

```
@lilypond
\relative {
  c'2 e2 \tuplet 3/2 { f8 a b } a2 e4
}
@end lilypond
```


produces



Options to control the appearance of snippets can be added, too. Using L<sup>A</sup>T<sub>E</sub>X syntax, this example

```
\begin{lilypond}[fragment, quote, staffsize=26]
c'4 f16
\end{lilypond}
```


produces



Larger music snippets can be put into separate files. Using HTML syntax, this example

```
<lilypondfile quote noindent>
  snippets/screech-and-boink.ly
</lilypondfile>
```

produces

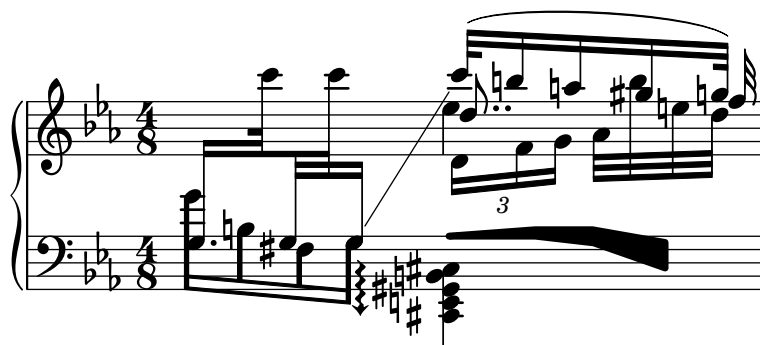

If a tagline is required, either default or custom, the entire snippet must be enclosed in a `\book { }` construct.

```
\book {
  \header { title = "A scale in LilyPond" }

  \relative { c' d e f g a b c }
```

}

### A scale in LilyPond



Music engraving by LilyPond 2.24.2—[www.lilypond.org](http://www.lilypond.org)

## 3.2 Integrating music and text

Here we explain in detail how to integrate LilyPond with various output formats.

### 3.2.1 $\LaTeX$

$\LaTeX$  is the de-facto standard for publishing layouts in the exact sciences. It is built on top of the  $\TeX$  typesetting engine, providing the best typography available anywhere.

See *The Not So Short Introduction to  $\LaTeX$*  (<https://www.ctan.org/tex-archive/info/lshort/english/>) for an overview on how to use  $\LaTeX$ .

lilypond-book provides the following commands and environments to include music in  $\LaTeX$  files:

- the `\lilypond{...}` command to directly enter short LilyPond code,
- the `\begin{lilypond}...\end{lilypond}` environment to directly enter longer LilyPond code,
- the `\lilypondfile{...}` command to insert a LilyPond file,
- the `\musicxmlfile{...}` command to insert a MusicXML file, which gets processed by `musicxml2ly` and `lilypond`.

In the input file, music is specified with any of the following commands:

```
\begin{lilypond}[options,go,here]
  YOUR LILYPOND CODE
\end{lilypond}

\begin[options,go,here]{lilypond}
  YOUR LILYPOND CODE
\end{lilypond}

\lilypond[options,go,here]{ YOUR LILYPOND CODE }

\lilypondfile[options,go,here]{filename}

\musicxmlfile[options,go,here]{filename}
```

Additionally, `\lilypondversion` displays the current version of LilyPond. Running `lilypond-book` yields a file that can be further processed with  $\LaTeX$ .

We show some examples here. The `lilypond` environment

```
\begin{lilypond}[quote,fragment,staffsize=26]
  c'4 d' e' f' g'2 g'
\end{lilypond}
```

produces



The short version

```
\lilypond[quote,fragment,staffsize=11]{<c' e' g'>}
```

produces



The default line width of the music is computed by examining the commands in the document preamble (this is, the part of the document before `\begin{document}`). The `lilypond-book` command sends these to  $\text{\LaTeX}$  to find out how wide the text is. The line width for music fragments is then adjusted to the text width. Note that this heuristic algorithm can fail easily; in such cases it is necessary to use the `line-width` music fragment option.

Each snippet calls the following macros if they have been defined by the user:

- `\preLilyPondExample` is called before the music,
- `\postLilyPondExample` is called after the music,
- `\betweenLilyPondSystem[1]` is called between systems if `lilypond-book` splits the snippet into several chunks. It must be defined as taking one parameter, which is the number of files already included in this snippet. The default is to simply insert `\linebreak`.

## Selected Snippets

Sometimes it is useful to display music elements (such as ties and slurs) as if they continued after the end of the fragment. This can be done by breaking the staff and suppressing inclusion of the rest of the LilyPond output.

In  $\text{\LaTeX}$ , define `\betweenLilyPondSystem` in such a way that inclusion of other systems is terminated once the required number of systems are included. Since `\betweenLilyPondSystem` is first called *after* the first system, including only the first system is trivial.

```
\def\betweenLilyPondSystem#1{\endinput}

\begin{lilypond}[fragment]
  c'1\(\ e'(\ c'~ \break c' d) e f\)\
\end{lilypond}
```

If a greater number of systems is requested, a  $\text{\TeX}$  conditional must be used before `\endinput`. In this example, replace value 2 by the number of systems you want in the output.

```
\def\betweenLilyPondSystem#1{
  \ifnum#1<2\else\expandafter\endinput\fi
}
```

(Since `\endinput` immediately stops the processing of the current input file we need `\expandafter` to delay the call of `\endinput` after executing `\fi` so that the `\if...-\fi` clause is balanced.)

Remember that the definition of `\betweenLilyPondSystem` is effective until the current group is finished (such as the  $\text{\LaTeX}$  environment) or is overridden by another definition (which it is, in most cases, for the rest of the document). To reset your definition, write

```
\let\betweenLilyPondSystem\undefined
```

in your  $\text{\LaTeX}$  source.

This may be simplified by defining a  $\text{\TeX}$  macro

```
\def\onlyFirstNSystems#1{
  \def\betweenLilyPondSystem##1{%
    \ifnum##1<#1\else\expandafter\endinput\fi
  }
}
```

and then saying only how many systems you want before each fragment,

```
\onlyFirstNSystems{3}
\begin{lilypond}...\end{lilypond}
\onlyFirstNSystems{1}
\begin{lilypond}...\end{lilypond}
```

## See also

There are specific lilypond-book command line options and other details to know when processing L<sup>A</sup>T<sub>E</sub>X documents, see Section 3.4 [Invoking lilypond-book], page 35.

### 3.2.2 Texinfo

Texinfo is the standard format for documentation of the GNU project. An example of a Texinfo document is this manual. The HTML, PDF, and Info versions of the manual are made from the Texinfo document.

lilypond-book provides the following commands and environments to include music in Texinfo files:

- the `@lilypond{...}` command to directly enter short LilyPond code,
- the `@lilypond...@end lilypond` environment to directly enter longer LilyPond code,
- the `@lilypondfile{...}` command to insert a LilyPond file,
- the `@musicxmlfile{...}` command to insert a MusicXML file, which gets processed by `musicxml2ly` and `lilypond`.

In the input file, music is specified with any of the following commands

```
@lilypond[options,go,here]
  YOUR LILYPOND CODE
@end lilypond

@lilypond[options,go,here]{ YOUR LILYPOND CODE }

@lilypondfile[options,go,here]{filename}

@musicxmlfile[options,go,here]{filename}
```

Additionally, `@lilypondversion` displays the current version of LilyPond.

When lilypond-book is run on it, this results in a Texinfo file (with extension `.texi`) containing `@image` tags for HTML, Info and printed output. lilypond-book generates images of the music in EPS and PDF formats for use in the printed output, and in PNG format for use in HTML and Info output.

We show some examples here. The lilypond environment

```
@lilypond[quote,fragment]
  c'4 d' e' f' g'2 g'
@end lilypond
```

produces



The short version

```
@lilypond[quote,fragment,staffsize=11]{<c' e' g'>}
```

produces





## See also

There are specific lilypond-book command line options and other details to know when processing Texinfo documents, see Section 3.4 [Invoking lilypond-book], page 35.

### 3.2.3 HTML

lilypond-book provides the following commands and environments to include music in HTML files:

- the `<lilypond ... />` command to directly enter short LilyPond code,
- the `<lilypond>...</lilypond>` environment to directly enter longer LilyPond code,
- the `<lilypondfile>...</lilypondfile>` command to insert a LilyPond file,
- the `<musicxmlfile>...</musicxmlfile>` command to insert a MusicXML file, which gets processed by `musicxml2ly` and `lilypond`.

In the input file, music is specified with any of the following commands:

```
<lilypond options go here>
  YOUR LILYPOND CODE
</lilypond>
```

```
<lilypond options go here: YOUR LILYPOND CODE />
```

```
<lilypondfile options go here>filename</lilypondfile>
```

```
<musicxmlfile options go here>filename</musicxmlfile>
```

Additionally, `<lilypondversion/>` displays the current version of LilyPond.

We show some examples here. The `lilypond` environment

```
<lilypond quote fragment staffsize=26>
  c'4 d' e' f' g'2 g'
</lilypond>
```

produces



The short version

```
<lilypond quote fragment staffsize=11: <c' e' g'> />
```

produces



## See also

There are specific lilypond-book command line options and other details to know when processing HTML documents, see Section 3.4 [Invoking lilypond-book], page 35.

### 3.2.4 DocBook

For inserting LilyPond snippets it is good to keep the conformity of DocBook documents, allowing the use of DocBook editors, validation, etc. For this reason no custom tags are provided, only specifying conventions based on standard DocBook elements.

## Common conventions

For inserting all types of snippets we use the `mediaobject` and `inlinemediaobject` elements to format snippets inline or not inline, respectively. The snippet formatting options are always provided in the `role` property of the innermost element (see next sections). Tags are chosen to allow DocBook editors format the content gracefully. The DocBook files to be processed with `lilypond-book` should have the extension `.lyxml`.

## Including a LilyPond file

This is the simplest case. We must use the `.ly` extension for the included file and insert it as a standard `imageobject`, with the following structure:

```
<mediaobject>
  <imageobject>
    <imagedata fileref="music1.ly"
              role="printfilename" />
  </imageobject>
</mediaobject>
```

Note that you can use `mediaobject` or `inlinemediaobject` as the outermost element as you wish.

## Including LilyPond code

Including LilyPond code is possible by using a `programlisting` environment where the language is set to `lilypond`, with the following structure:

```
<inlinemediaobject>
  <textobject>
    <programlisting language="lilypond"
                  role="fragment verbatim staffsize=16
                  ragged-right relative=2">
\context Staff \with {
  \remove Time_signature_engraver
  \remove Clef_engraver}
{ c4( fis) }
    </programlisting>
  </textobject>
</inlinemediaobject>
```

As you can see, the outermost element is a `mediaobject` or `inlinemediaobject`, and there is a `textobject` containing the `programlisting` inside.

## Processing the DocBook document

Running `lilypond-book` on a `.lyxml` file creates a valid DocBook document (with extension `.xml`) to be further processed. If you use `dblatex` (<http://dblatex.sourceforge.net>), it creates a PDF file from this document automatically. For HTML (HTML Help, JavaHelp, etc.) generation you can use the official DocBook XSL stylesheets; however, it is possible that you have to make some customization for it.

## 3.3 Music fragment options

In the following, a ‘LilyPond command’ refers to any command described in the previous sections which is handled by `lilypond-book` to produce a music snippet. For simplicity, LilyPond commands are only shown in  $\text{\LaTeX}$  syntax.

Note that the option string is parsed from left to right; if an option occurs multiple times, the last one is taken.

The following options are available for LilyPond commands:

`staffsize=ht`

Set staff size to *ht*, which is measured in points.

`ragged-right`

Produce ragged-right lines with natural spacing, i.e., `ragged-right = ##t` is added to the LilyPond snippet. Single-line snippets will always be typeset by default as ragged-right, unless `noragged-right` is explicitly given.

`noragged-right`

For single-line snippets, allow the staff length to be stretched to equal that of the line width, i.e., `ragged-right = ##f` is added to the LilyPond snippet.

`line-width`

`line-width=size\unit`

Set line width to *size* (expressed in *unit*). *unit* is one of the following: cm, mm, in, pt, or bp. This option affects LilyPond output (that is, the staff length of the music fragment), not the text layout.

If used without an argument, set line width to a default value (as computed with a heuristic algorithm).

If no `line-width` option is given, `lilypond-book` tries to guess a default for `lilypond` environments which don't use the `ragged-right` option.

`papersize=string`

Set paper size to *string* (for example `a5` or `letter`) for music fragments that use `\book`. See Section “Predefined paper sizes” in *Notation Reference* for a list of available paper sizes.

This option affects LilyPond output (that is, the paper size of the music fragment), not the text layout. Unknown values of *string* are ignored: a warning is emitted and the snippet is printed using the default `a4` size.

`paper-width=size\unit`

Set paper width to *size* (expressed in *unit*) for music fragments that use `\book`. *unit* is one of the following: cm, mm, in, pt, or bp.

This option affects LilyPond output (that is, the paper width of the music fragment), not the text layout. If set, it overrides option `papersize` if given. If option `paper-height` is not specified, the paper height is set to the default A4 paper height (296 mm).

`paper-height=size\unit`

Set paper height to *size* (expressed in *unit*) for music fragments that use `\book`. *unit* is one of the following: cm, mm, in, pt, or bp.

This option affects LilyPond output (that is, the paper height of the music fragment), not the text layout. If set, it overrides option `papersize` if given. If option `paper-width` is not specified, the paper width is set to the default A4 paper width (210 mm).

Example:

```
\lilypond[paper-width=10\cm, paper-height=57\mm]{
  \book {
    ...
  }
}
```

`notime`

Do not print the time signature and turn off the timing (time signature, bar lines) in the score.

**fragment** Make lilypond-book add some boilerplate code so that you can simply enter, say,

```
c'4
```

without `\layout`, `\score`, etc.

**nofragment** Do not add additional code to complete LilyPond code in music snippets. Since this is the default, `nofragment` is redundant normally.

**inline** Set up snippet for inline use, that is, to be typeset within a paragraph. The snippet itself is formatted with a very small left padding (approximately the same as the right padding), ignoring the value given by the command line option `--left-padding`. For Texinfo output, it suppresses the insertion of a blank line before and after the snippet. For HTML output, it suppresses the insertion of `<p>` before and `</p>` after the snippet.

To actually make a snippet appear inline in  $\text{\LaTeX}$  and Texinfo mode, it is necessary to position it within a paragraph, avoiding an empty line before and after the snippet. For example

```
The motive
\lilypond[inline,staffsize=11]{
  { \time 2/4 r8 g'[ g' g'] | es'2 }
}
is widely known.
```

becomes

The motive  is widely known.

**indent=size\unit**

Set indentation of the first music system to *size* (expressed in *unit*). *unit* is one of the following: cm, mm, in, pt, or bp. This option affects LilyPond, not the text layout.

**noindent** Set indentation of the first music system to zero. This option affects LilyPond, not the text layout. Since no indentation is the default, `noindent` is redundant normally.

**quote** Reduce line length of a music snippet by  $2 \times 0.4$  in and put the output into a quotation block. The value '0.4in' can be controlled with the `exampleindent` option.

**exampleindent**

Set the amount by which the quote option indents a music snippet.

**relative**

**relative=n**

Use relative octave mode. By default, notes are specified relative to middle C. The optional integer argument specifies the octave of the starting note, where the default 1 is middle C. `relative` option only works when `fragment` option is set, so `fragment` is automatically implied by `relative`, regardless of the presence of any (no)fragment option in the source.

LilyPond also uses lilypond-book to produce its own documentation. To do that, some more obscure music fragment options are available.

**verbatim** The argument of a LilyPond command is copied to the output file and enclosed in a verbatim block, followed by any text given with the `intertext` option (not implemented yet); then the actual music is displayed. This option does not work well with `\lilypond{}` if it is part of a paragraph.

If `verbatim` is used in a `lilypondfile` command, it is possible to enclose verbatim only a part of the source file. If the source file contain a comment containing ‘begin verbatim’ (without quotes), quoting the source in the verbatim block will start after the last occurrence of such a comment; similarly, quoting the source verbatim will stop just before the first occurrence of a comment containing ‘end verbatim’, if there is any. In the following source file example, the music will be interpreted in relative mode, but the verbatim quote will not show the relative block, i.e.,

```
\relative { % begin verbatim
  c'4 e2 g4
  f2 e % end verbatim
}
```

will be printed with a verbatim block like

```
c4 e2 g4
f2 e
```

If you would like to translate comments and variable names in verbatim output but not in the sources, you may set the environment variable `LYDOC_LOCALEDIR` to a directory path; the directory should contain a tree of `.mo` message catalogs with `lilypond-doc` as a domain.

**texidoc** (Only for Texinfo output.) If `lilypond` is called with the `--header=texidoc` option, and the file to be processed is called `foo.ly`, it creates a file `foo.texidoc` if there is a `texidoc` field in the `\header`. The `texidoc` option makes `lilypond-book` include such files, adding its contents as a documentation block right before the music snippet (but outside the example environment generated by a `quote` option).

Assuming the file `foo.ly` contains

```
\header {
  texidoc = "This file demonstrates a single note."
}
{ c'4 }
```

and we have this in our Texinfo document `test.texinfo`

```
@lilypondfile[texidoc]{foo.ly}
```

the following command line gives the expected result

```
lilypond-book --pdf --process="lilypond \
  --header=texidoc" test.texinfo
```

Most LilyPond test documents (in the input directory of the distribution) are small `.ly` files which look exactly like this.

For localization purpose, if the Texinfo document contains `@documentlanguage LANG` and `foo.ly` header contains a `texidocLANG` field, and if `lilypond` is called with `--header=texidocLANG`, then `foo.texidocLANG` will be included instead of `foo.texidoc`.

**doctitle** (Only for Texinfo output.) This option works similarly to `texidoc` option: if `lilypond` is called with the `--header=doctitle` option, and the file to be processed is called `foo.ly` and contains a `doctitle` field in the `\header`, it creates a file `foo.doctitle`. When `doctitle` option is used, the contents of `foo.doctitle`, which should be a single line of *text*, is inserted in the Texinfo document as `@lydoctitle text`. `@lydoctitle` should be a macro defined in the Texinfo document. The same remark about `texidoc` processing with localized languages also applies to `doctitle`.

nogettext

(Only for Texinfo output.) Do not translate comments and variable names in the snippet quoted verbatim.

printfilename

If a LilyPond input file is included with `\lilypondfile`, print the file name right before the music snippet. For HTML output, this is a link. Only the base name of the file is printed, i.e., the directory part of the file path is stripped.

## 3.4 Invoking lilypond-book

`lilypond-book` produces a file with one of the following extensions: `.tex`, `.texi`, `.html` or `.xml`, depending on the output format. All of `.tex`, `.texi` and `.xml` files need further processing.

### Format-specific instructions

#### L<sup>A</sup>T<sub>E</sub>X

There are two ways of processing your L<sup>A</sup>T<sub>E</sub>X document for printing or publishing: getting a PDF file directly with PDFL<sup>A</sup>T<sub>E</sub>X, or getting a PostScript file with L<sup>A</sup>T<sub>E</sub>X via a DVI to PostScript translator like `dvips`. The first way is simpler and recommended<sup>1</sup>, and whichever way you use, you can easily convert between PostScript and PDF with tools, like `ps2pdf` and `pdf2ps` included in Ghostscript package.

To produce a PDF file through PDFL<sup>A</sup>T<sub>E</sub>X, use:

```
lilypond-book --pdf yourfile.lytex
pdflatex yourfile.tex
```

To produce PDF output via L<sup>A</sup>T<sub>E</sub>X/`dvips`/`ps2pdf`:

```
lilypond-book yourfile.lytex
latex yourfile.tex
dvips -Ppdf yourfile.dvi
ps2pdf yourfile.ps
```

The `.dvi` file created by this process will not contain note heads. This is normal; if you follow the instructions, they will be included in the `.ps` and `.pdf` files.

Running `dvips` may produce some warnings about fonts; these are harmless and may be ignored. If you are running `latex` in `twocolumn` mode, remember to add `-t landscape` to the `dvips` options.

Environments such as;

```
\begin{lilypond} ... \end{lilypond}
```

are not interpreted by L<sup>A</sup>T<sub>E</sub>X. Instead, `lilypond-book` extracts those ‘environments’ into files of its own and runs LilyPond on them. It then takes the resulting graphics and creates a `.tex` file where the `\begin{lilypond}... \end{lilypond}` macros are then replaced by ‘graphics inclusion’ commands. It is at this time that L<sup>A</sup>T<sub>E</sub>X is run (although L<sup>A</sup>T<sub>E</sub>X will have run previously, it will have been, effectively, on an ‘empty’ document in order to calculate things like `\linewidth`).

### Known issues and warnings

The `\pageBreak` command will not work within a `\begin{lilypond} ... \end{lilypond}` environment.

---

<sup>1</sup> Note that PDFL<sup>A</sup>T<sub>E</sub>X and L<sup>A</sup>T<sub>E</sub>X may not be both usable to compile any L<sup>A</sup>T<sub>E</sub>X document, that is why we explain the two ways.

Many `\paper` block variables will also not work within a `\begin{lilypond} ... \end{lilypond}` environment. Use `\newcommand` with `\betweenLilyPondSystem` in the preamble;

```
\newcommand{\betweenLilyPondSystem}[1]{\vspace{36mm}\linebreak}
```

## Texinfo

To produce a Texinfo document (in any output format), follow the normal procedures for Texinfo; this is, either call `texi2pdf` or `texi2dvi` or `makeinfo`, depending on the output format you want to create. By default, `texi2pdf` uses `pdftex` for processing, which you can verify in the console output. In this case, run `lilypond-book` with the `--pdf` option so that it creates `.pdf` snippets instead of `.eps` files. `pdftex` is unable to include the latter ones and will output an error message otherwise.

See the documentation of Texinfo for further details.

## Command line options

`lilypond-book` accepts the following command line options.

`-f format`

`--format=format`

Specify the document type to process: `html`, `latex`, `texi` (the default), `texi-html`, or `docbook`. If this option is missing, `lilypond-book` tries to detect the format automatically, see Section 3.5 [Filename extensions], page 38. Currently, `texi-html` is the same as `texi`.

`-F filter`

`--filter=filter`

Pipe snippets through *filter*. Example:

```
lilypond-book --filter='convert-ly --from=2.0.0 -' my-book.tely
```

`lilypond-book` does not accept options `--filter` and `--process` at the same time.

`-h`

`--help` Print a short help message.

`-I dir`

`--include=dir`

Add *dir* to the include path. Since `lilypond-book` also looks for already compiled snippets in the include path and does not write them back to the output directory, it is necessary in some cases to invoke further processing commands such as `makeinfo` or `latex` with the same `-I dir` options.

`-l loglevel`

`--loglevel=loglevel`

Set the output verbosity to *loglevel*. Possible values are `NONE`, `ERROR`, `WARNING`, `PROGRESS` (default), and `DEBUG`. If this option is not used and the environment variable `LILYPOND_BOOK_LOGLEVEL` is set, its value is used as the log level.

`-o dir`

`--output=dir`

Place generated files into directory *dir*. Running `lilypond-book` generates lots of small files that LilyPond will process. To avoid all that clutter in the source directory, use the `--output` command line option, and change to that directory before running `latex` or `makeinfo`.

```
lilypond-book --output=out yourfile.lytex
cd out
...
```

- `--skip-lily-check`  
Do not fail if no LilyPond output is found. It is used for generating LilyPond's Info documentation without images.
- `--skip-png-check`  
Do not fail if no PNG images are found for EPS files. It is used for generating LilyPond's Info documentation without images.
- `--lily-output-dir=dir`  
Write `lily-XXX` files to directory *dir* and link into `--output` directory. Use this option to save building time for documents in different directories that share a lot of identical snippets.
- `--lily-loglevel=loglevel`  
Set the output verbosity of the invoked `lilypond` command to *loglevel*. Possible values are NONE, ERROR, WARNING, BASIC, PROGRESS, INFO (default), and DEBUG. If this option is not used and the environment variable `LILYPOND_LOGLEVEL` is set, its value is used as the log level.
- `--info-images-dir=dir`  
Format Texinfo output so that Info will look for images of music in directory *dir*.
- `--latex-program=prog`  
Run executable *prog* instead of `latex`. This is useful if your document is processed with `xelatex`, for example.
- `--left-padding=amount`  
Pad LilyPond snippets on the left with whitespace.  
*amount* is rounded up to be an integer multiple of a *big point* (bp). One bp is 1/72th of an inch (approx. 0.353 mm). *amount* is given in millimeters *relative to the start of the staff*. The default value is 3.175 mm (which equals 9 bp).  
The widths of tightly clipped systems can vary due to notation elements such as bar numbers or instrument names that are positioned left of the beginning of staves. The padding sets the minimum distance between the left margin of the snippet images and the beginning of (non-indented) staves; this allows the expected vertical alignment of snippets in the master document.  
In addition to padding at the left, this option shortens each staff line by *amount*. As a consequence, each line is moved to the right visually.
- `-P command`
- `--process=command`  
Process LilyPond snippets using *command*. The default command is `lilypond`. `lilypond-book` does not accept options `--filter` and `--process` at the same time.
- `--pdf`  
Create PDF snippet files. If not set, only PNG and EPS files are produced. Use this option if you want to directly embed PDF files into  $\LaTeX$  or Texinfo files.
- `--redirect-lilypond-output`  
By default, logging output is displayed on the terminal. This option redirects all output to log files in the same directory as the source files.
- `--use-source-file-names`  
Write snippet output files with the same base name as their source file. This option works only for snippets included with the `lilypondfile` command and only if directories implied by `--output-dir` and `--lily-output-dir` options are different.
- `-V`
- `--verbose`  
Be verbose. This is equivalent to `--loglevel=DEBUG`.



```
-v
--version
```

Print version information.

## Known issues and warnings

The Texinfo command `@pagesizes` is not interpreted. Similarly,  $\text{\LaTeX}$  commands that change margins and line widths after the preamble are ignored.

Only the first `\score` of a LilyPond block is processed.

## 3.5 Filename extensions

You can use any filename extension for the input file, but if you do not use the recommended extension for a particular format you may need to manually specify the output format; for details, see Section 3.4 [Invoking lilypond-book], page 35. Otherwise, lilypond-book automatically selects the output format based on the input filename’s extension.

extension	output format
.html	HTML
.htmly	HTML
.itely	Texinfo
.latex	$\text{\LaTeX}$
.lytex	$\text{\LaTeX}$
.lyxml	DocBook
.tely	Texinfo
.tex	$\text{\LaTeX}$
.texi	Texinfo
.texinfo	Texinfo
.xml	HTML

If you use the same filename extension for the input file than the extension lilypond-book uses for the output file, and if the input file is in the same directory as lilypond-book working directory, you must use `--output` option to make lilypond-book running, otherwise it will exit with an error message like “Output would overwrite input file”.

## 3.6 lilypond-book templates

These templates are for use with lilypond-book. If you’re not familiar with this program, please refer to Chapter 3 [Running lilypond-book], page 23.

### 3.6.1 $\text{\LaTeX}$

You can include LilyPond fragments in a  $\text{\LaTeX}$  document.

```
\documentclass[]{article}

\begin{document}

Normal  $\text{\LaTeX}$  text.

\begin{lilypond}
\relative {
  a'4 b c d
}
\end{lilypond}
```

More LaTeX text, and options in square brackets.

```
\begin{lilypond}[fragment,relative=2,quote,staffsize=26,verbatim]
d4 c b a
\end{lilypond}
\end{document}
```

### 3.6.2 Texinfo

You can include LilyPond fragments in Texinfo; in fact, this entire manual is written in Texinfo.

```
\input texinfo
@ifnottex
@node Top
@top
@end ifnottex
```

Texinfo text

```
@lilypond
\relative {
  a4 b c d
}
@end lilypond
```

More Texinfo text, and options in brackets.

```
@lilypond[verbatim,fragment,ragged-right]
d4 c b a
@end lilypond
```

```
@bye
```

### 3.6.3 html

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN">
<HTML>
<body>
```

```
<p>
Documents for lilypond-book may freely mix music and text. For
example,
<lilypond>
\relative {
  a'4 b c d
}
</lilypond>
</p>
```

```
<p>
Another bit of lilypond, this time with options:
```

```
<lilypond fragment quote staffsize=26 verbatim>
a4 b c d
```

```

</lilypond>
</p>

</body>
</html>

```

### 3.6.4 xelatex

```

\documentclass{article}
\usepackage{ifxetex}
\ifxetex
%xetex specific stuff
\usepackage{xunicode,fontspec,xltxtra}
\setmainfont[Numbers=OldStyle]{Times New Roman}
\setsansfont{Arial}
\else
%This can be empty if you are not going to use pdftex
\usepackage[T1]{fontenc}
\usepackage[utf8]{inputenc}
\usepackage{mathptmx}%Times
\usepackage{helvet}%Helvetica
\fi
%Here you can insert all packages that pdftex also understands
\usepackage[ngerman,finnish,english]{babel}
\usepackage{graphicx}

\begin{document}
\title{A short document with LilyPond and xelatex}
\maketitle

```

Normal `\textbf{font}` commands inside the `\emph{text}` work, because they `\textsf{are}` supported by `\LaTeX{}` and `XeTeX{}`. If you want to use specific commands like `\verb+\XeTeX+`, you should include them again in a `\verb+\ifxetex+` environment. You can use this to print the `\ifxetex \XeTeX{}` command `\else XeTeX command \fi` which is not known to normal `\LaTeX` .

In normal text you can easily use LilyPond commands, like this:

```

\begin{lilypond}
{a2 b c'8 c' c' c'}
\end{lilypond}

\noindent
and so on.

```

The fonts of snippets set with LilyPond will have to be set from inside of the snippet. For this you should read the AU on how to use lilypond-book.

```
\selectlanguage{ngerman}
Auch Umlaute funktionieren ohne die \LaTeX -Befehle, wie auch alle
anderen
seltsamen Zeichen: __ _____, wenn sie von der Schriftart
unterst__tzt werden.
\end{document}
```

### 3.7 Sharing the table of contents

These functions already exist in the `OrchestralLily` package:

<https://repo.or.cz/w/orchestrallily.git>

For greater flexibility in text handling, some users prefer to export the table of contents from lilypond and read it into  $\text{\LaTeX}$ .

### Exporting the ToC from LilyPond

This assumes that your score has multiple movements in the same lilypond output file.

```

#(define (oly:create-toc-file layout pages)
  (let* ((label-table (ly:output-def-lookup layout 'label-page-table)))
    (if (not (null? label-table))
        (let* ((format-line (lambda (toc-item)
                              (let* ((label (car toc-item))
                                     (text (caddr toc-item))
                                     (label-page (and (list? label-table)
                                                       (assoc label label-table)))
                                     (page (and label-page (cdr label-page))))
                                (format #f "~a, section, 1, {~a}, ~a" page text label))))
              (formatted-toc-items (map format-line (toc-items)))
              (whole-string (string-join formatted-toc-items "\n"))
              (output-name (ly:parser-output-name))
              (outfile-name (format #f "~a.toc" output-name))
              (outfile (open-output-file outfile-name)))
          (if (output-port? outfile)
              (display whole-string outfile)
              (ly:warning (G_ "Unable to open output file ~a for the TOC information") outfile-name))
          (close-output-port outfile))))))

\paper {
  #(define (page-post-process layout pages) (oly:create-toc-file layout pages))
}
```

### Importing the ToC into LaTeX

In LaTeX, the header should include:

```
\usepackage{pdfpages}
\includescore{nameofthescore}
```

where `\includescore` is defined as:

```

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% \includescore{PossibleExtension}
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

% Read in the TOC entries for a PDF file from the corresponding .toc file.
% This requires some heavy latex tweaking, since reading in things from a file
% and inserting it into the arguments of a macro is not (easily) possible

% Solution by Patrick Fimml on #latex on April 18, 2009:
% \readfile{filename}{\variable}
% reads in the contents of the file into \variable (undefined if file
% doesn't exist)
```

```

\newread\readfile@f
\def\readfile@line#1{%
{\catcode`\^M=10\global\read\readfile@f to \readfile@tmp}%
\edef\do{\noexpand\g@addto@macro{\noexpand#1}{\readfile@tmp}}\do%
\ifeof\readfile@f\else%
\readfile@line{#1}%
\fi%
}
\def\readfile#1#2{%
\openin\readfile@f=#1 %
\ifeof\readfile@f%
\typeout{No TOC file #1 available!}%
\else%
\gdef#2{%
\readfile@line{#2}%
\fi
\closein\readfile@f%
}%

\newcommand{\includescore}[1]{
\def\oly@fname{\oly@basename\@ifmtarg{#1}{_}{_#1}}
\let\oly@addtotoc\undefined
\readfile{\oly@xxxxxxxx}{\oly@addtotoc}
\ifx\oly@addtotoc\undefined
\includepdf[pages=-]{\oly@fname}
\else
\edef\includeit{\noexpand\includepdf[pages=-,addtotoc={\oly@addtotoc}]
{\oly@fname}}\includeit
\fi
}

```

### 3.8 Alternative methods of mixing text and music

Other means of mixing text and music (without lilypond-book) are discussed in Section 4.4 [LilyPond output in other programs], page 50.

## 4 External programs

LilyPond can interact with other programs in various ways.

### 4.1 Point and click

Point and click lets you find notes in the input by clicking on them in the PDF viewer. This makes it easier to find input that causes some error in the sheet music.

#### 4.1.1 Configuring the system

When this functionality is active, LilyPond adds hyperlinks to PDF and SVG files. These hyperlinks are sent to a ‘URI helper’ or a web-browser, which opens a text-editor with the cursor in the right place.

To make this chain work, you should configure your PDF viewer to follow hyperlinks using the `lilypond-invoke-editor` script supplied with LilyPond.

The program `lilypond-invoke-editor` is a small helper program. It will invoke an editor for the special `textedit` URIs, and run a web browser for others. It looks up the environment variables `EDITOR` and `LYEDITOR` to find out and launch the favorite editor to use. `LYEDITOR` will have priority over `EDITOR`, so we recommend using the former especially if you want to use one editor in the terminal and another editor for LilyPond point and click.

Every editor may have a different syntax to open a file in a specific line and column. For user’s convenience, LilyPond comes with ready commands for several editors, listed in `scripts/lilypond-invoke-editor.py`. This means that you can simply write the editor binary name, e.g.:

```
export LYEDITOR=atom
```

and this will invoke

```
atom %(file)s:%(line)s:%(column)s
```

where `%(file)s`, `%(line)s` and `%(column)s` are replaced with the file, line and column respectively.

In order to use an editor not listed in the script, you should find its specific syntax and assign the full command to `LYEDITOR`. Here’s an example for Visual Studio Code editor:

```
export LYEDITOR="code --goto %(file)s:%(line)s:%(column)s"
```

**Note:** If you choose Emacs, an extra configuration is needed. You should add the line `(server-start)` to your `~/.emacs` file, otherwise every click on an object in the PDF will open a new Emacs window.

### Using GNOME

In GNOME, URIs are handled via ‘.desktop’ files. Create a file in a local directory such as `/tmp` that is called `lilypond-invoke-editor.desktop` and has the contents;

```
[Desktop Entry]
Version=1.0
Name=lilypond-invoke-editor
GenericName=Textedit URI handler
Comment=URI handler for textedit:
Exec=lilypond-invoke-editor %u
Terminal=false
Type=Application
MimeType=x-scheme-handler/textedit;
```

```
Categories=Editor
NoDisplay=true
```

and then execute the commands

```
xdg-desktop-menu install ./lilypond-invoke-editor.desktop
xdg-mime default lilypond-invoke-editor.desktop x-scheme-handler/textedit
```

After that invocation;

```
xdg-open textedit:///etc/issue:1:0:0
```

should call `lilypond-invoke-editor` for opening files.

## Extra configuration for Evince

If `xdg-open` works, but Evince still refuses to open point and click links due to denied permissions, you might need to change the Apparmor profile of Evince which controls the kind of actions Evince is allowed to perform.

For Ubuntu, the process is to edit the file `/etc/apparmor.d/local/usr.bin.evince` and append the following lines:

```
# For Textedit links
/usr/local/bin/lilypond-invoke-editor Cx -> sanitized_helper,
```

After adding these lines, call

```
sudo apparmor_parser -r -T -W /etc/apparmor.d/usr.bin.evince
```

Now Evince should be able to open point and click links. It is likely that similar configurations will work for other viewers.

## Enabling point and click

Point and click functionality is enabled by default when creating PDF or SVG files.

The point and click links enlarge the output files significantly. For reducing the size of these (and PS) files, point and click may be switched off by issuing

```
\pointAndClickOff
```

in a `.ly` file. Point and click may be explicitly enabled with

```
\pointAndClickOn
```

Alternately, you may disable point and click with a command-line option:

```
lilypond -dno-point-and-click file.ly
```

**Note:** You should always turn off point and click in any LilyPond files to be distributed to avoid including path information about your computer in the PDF file, which can pose a security risk.

## Selective point-and-click

For some interactive applications, it may be desirable to only include certain point-and-click items. For example, if somebody wanted to create an application which played audio or video starting from a particular note, it would be awkward if clicking on the note produced the point-and-click location for an accidental or slur which occurred over that note.

This may be controlled by indicating which events to include:

- Hard-coded in the `.ly` file:

```
\pointAndClickTypes #'note-event
\relative {
  c'2\f( f)
```

- ```

    }
or
    #(ly:set-option 'point-and-click 'note-event)
    \relative {
      c'2\f( f)
    }

```
- Command-line:
 

```
lilypond -dpoint-and-click=note-event example.ly
```
- Multiple events can be included:
- Hard-coded in the .ly file:
 

```

\pointAndClickTypes #'(note-event dynamic-event)
\relative {
  c'2\f( f)
}

```
  - or
 

```

#(ly:set-option 'point-and-click '(note-event dynamic-event))
\relative {
  c'2\f( f)
}

```
  - Command-line:
 

```

lilypond \
-e"(ly:set-option 'point-and-click '(note-event dynamic-event))" \
example.ly

```

## 4.2 Text editor support

There is support for different text editors for LilyPond.

### Emacs mode

Emacs has a `lilypond-mode`, which provides keyword autocompletion, indentation, LilyPond specific parenthesis matching and syntax coloring, handy compile short-cuts and reading LilyPond manuals using Info. If `lilypond-mode` is not installed on your platform, see below.

An Emacs mode for entering music and running LilyPond is contained in the source archive in the `elisp` directory. Do make `install` to install it to `elispdir`. The file `lilypond-init.el` should be placed to `load-path/site-start.d/` or appended to your `~/.emacs` or `~/.emacs.el`.

As a user, you may want add your source path (e.g. `~/site-lisp/`) to your `load-path` by appending the following line (as modified) to your `~/.emacs`

```
(setq load-path (append (list (expand-file-name "~/site-lisp")) load-path))
```

### Vim mode

For Vim (<https://www.vim.org>), a filetype plugin, indent mode, and syntax-highlighting mode are available to use with LilyPond. To enable all of these features, create (or modify) your `$HOME/.vimrc` to contain these three lines, in order:

```

filetype off
set runtimepath+="/usr/local/share/lilypond/current/vim/"
filetype on
syntax on

```

If LilyPond is not installed in the `/usr/local/` directory, change the path appropriately. This topic is discussed in Section “Other sources of information” in *Learning Manual*.



## Other editors

Other editors (both text and graphical) support LilyPond, but their special configuration files are not distributed with LilyPond. Consult their documentation for more information. Such editors are listed in Section “Easier editing” in *General Information*.

## 4.3 Converting from other formats

Music can be entered also by importing it from other formats. This chapter documents the tools included in the distribution to do so. There are other tools that produce LilyPond input, for example GUI sequencers and XML converters. Refer to the website (<https://lilypond.org>) for more details.

These are separate programs from lilypond itself, and are run on the command line; see Section 1.2 [Command-line usage], page 1, for more information.

## Known issues and warnings

We unfortunately do not have the resources to maintain these programs; please consider them “as-is”. Patches are appreciated, but bug reports will almost certainly not be resolved.

### 4.3.1 Invoking midi2ly

midi2ly translates a Type 1 MIDI file to a LilyPond source file.

MIDI (Music Instrument Digital Interface) is a standard for digital instruments: it specifies cabling, a serial protocol and a file format. The MIDI file format is a de facto standard format for exporting music from other programs, so this capability may come in useful when importing files from a program that has a converter for a direct format.

midi2ly converts tracks into Section “Staff” in *Internals Reference* and channels into Section “Voice” in *Internals Reference* contexts. Relative mode is used for pitches, durations are only written when necessary.

It is possible to record a MIDI file using a digital keyboard, and then convert it to .ly. However, human players are not rhythmically exact enough to make a MIDI to LY conversion trivial. When invoked with quantizing (`-s` and `-d` options) midi2ly tries to compensate for these timing errors, but is not very good at this. It is therefore not recommended to use midi2ly for human-generated midi files.

It is invoked from the command-line as follows,

```
midi2ly [option]... midi-file
```

Note that by ‘command-line’, we mean the command line of the operating system. See Section 4.3 [Converting from other formats], page 46, for more information about this.

The following options are supported by midi2ly.

`-a, --absolute-pitches`

Print absolute pitches.

`-d, --duration-quant=DUR`

Quantize note durations on *DUR*.

`-e, --explicit-durations`

Print explicit durations.

`-h, --help`

Show summary of usage.

`-k, --key=acc[:minor]`

Set default key. *acc* > 0 sets number of sharps; *acc* < 0 sets number of flats. A minor key is indicated by :1.

```

-o, --output=file
    Write output to file.
-s, --start-quant=DUR
    Quantize note starts on DUR.
-t, --allow-tuplet=DUR*NUM/DEN
    Allow tuplet durations DUR*NUM/DEN.
-v, --verbose
    Be verbose.
-V, --version
    Print version number.
-w, --warranty
    Show warranty and copyright.
-x, --text-lyrics
    Treat every text as a lyric.

```

## Known issues and warnings

Overlapping notes in an arpeggio will not be correctly rendered. The first note will be read and the others will be ignored. Set them all to a single duration and add phrase markings or pedal indicators.

### 4.3.2 Invoking musicxml2ly

MusicXML (<http://www.musicxml.org/>) is an XML dialect for representing music notation.

musicxml2ly extracts notes, articulations, score structure and lyrics from ‘part-wise’ MusicXML files then writes them to a .ly file. It is run from the command-line as follows;

```
musicxml2ly [option]... file.xml
```

Note that by ‘command-line’, we mean the command line of the operating system. See Section 4.3 [Converting from other formats], page 46, for more information about this.

If - is used instead of *file.xml*, musicxml2ly reads all input directly from the command line.

The following options are supported by musicxml2ly:

```

-a, --absolute
    convert pitches in absolute mode.

--fb --fretboards
    converts <frame> events to a separate FretBoard voice instead of markups.

-h, --help
    print usage and a summary of all the available command line options.

-l, --language=LANG
    use LANG for pitch names, e.g. deutsch for note names in German.

--loglevel=LOGLEVEL
    Sets the output verbosity to LOGLEVEL. Possible values are NONE, ERROR, WARNING,
    PROGRESS (default) and DEBUG.

--lxml
    use the lxml.etree Python package for XML-parsing; uses less memory and cpu time.

-m, --midi
    activate the midi block in the .ly file.

--nb, --no-beaming
    do not convert beaming information, use LilyPond’s automatic beaming instead.

```

```

--nd, --no-articulation-directions
    do not convert directions (^, _ or -) for articulations, dynamics, etc.
--nrp, --no-rest-positions
    do not convert exact vertical position of rests.
--nsb, --no-system-breaks
    ignore system breaks.
--npl, --no-page-layout
    do not convert the exact page layout and breaks (shortcut for --nsb --npb --npm
    options).
--npb, --no-page-breaks
    ignore page breaks.
--npm, --no-page-margins
    ignore page margins.
--nsd, --no-stem-directions
    ignore stem directions from MusicXML, use lilypond's automatic stemming instead.
-o, --output=FILE
    set the output filename to FILE. If file is -, the output will be printed to stdout. If
    not given, xmlfile.ly will be used instead.
-r, --relative
    convert pitches in relative mode (default).
--transpose=TOPITCH
    the interval between pitch c and TOPITCH to transpose by.
--sm, --shift-meter=BEATS/BEATTYPE
    change the length|duration of notes as a function of a given time signature to make
    the score look faster or slower, (e.g. 4/4 or 2/2).
--tc, --tab-clef=TABCLEFNAME
    switch between two versions of tab clefs (tab and moderntab).
--sn --string-numbers=t[rue]/f[alse]
    deactivate string number stencil with --string-numbers false. Default is true.
-v, --verbose
    be verbose.
--version
    show version number and exit.
-z, --compressed
    input file is a zip-compressed MusicXML file.

```

### 4.3.3 Invoking abc2ly

**Note:** This is not currently supported and may eventually be removed from future versions of LilyPond.

ABC is a fairly simple ASCII based format. It is described at the ABC site:

<http://www.walshaw.plus.com/abc/learn.html>.

abc2ly translates from ABC to LilyPond. It is invoked as follows:

```
abc2ly [option]... abc-file
```

The following options are supported by `abc2ly`:

```
-b, --beams=None
    preserve ABC's notion of beams
-h, --help
    this help
-o, --output=file
    set output filename to file.
-s, --strict
    be strict about success
--version
    print version information.
```

There is a rudimentary facility for adding LilyPond code to the ABC source file. For example;

```
%%LY voices \set autoBeaming = ##f
```

This will cause the text following the keyword ‘voices’ to be inserted into the current voice of the LilyPond output file.

Similarly,

```
%%LY slyrics more words
```

will cause the text following the ‘slyrics’ keyword to be inserted into the current line of lyrics.

## Known issues and warnings

The ABC standard is not very ‘standard’. For extended features (e.g., polyphonic music) different conventions exist.

Multiple tunes in one file cannot be converted.

ABC synchronizes words and notes at the beginning of a line; `abc2ly` does not.

`abc2ly` ignores the ABC beaming.

### 4.3.4 Invoking `etf2ly`

**Note:** This is not currently supported and may eventually be removed from future versions of LilyPond.

ETF (Enigma Transport Format) is a format used by Coda Music Technology’s Finale product. `etf2ly` will convert part of an ETF file to a ready-to-use LilyPond file.

It is invoked from the command-line as follows;

```
etf2ly [option]... etf-file
```

Note that by ‘command-line’, we mean the command line of the operating system. See Section 4.3 [Converting from other formats], page 46, for more information about this.

The following options are supported by `etf2ly`:

```
-h, --help
    this help
-o, --output=FILE
    set output filename to FILE
--version
    version information
```

## Known issues and warnings

The list of articulation scripts is incomplete. Empty measures confuse `etf2ly`. Sequences of grace notes are ended improperly.

### 4.3.5 Other formats

LilyPond itself does not come with support for any other formats, but some external tools can also generate LilyPond files. These are listed in Section “Easier editing” in *General Information*.

## 4.4 LilyPond output in other programs

This section shows methods to integrate text and music, different than the automated method with `lilypond-book`.

### 4.4.1 Lua $\TeX$

As well as `lilypond-book` to integrate LilyPond output, there is an alternative program that can be used when using Lua $\TeX$  called `lyluatex` (<https://github.com/jperon/lyluatex/blob/master/README.md>).

### 4.4.2 OpenOffice and LibreOffice

LilyPond notation can be added to OpenOffice.org and LibreOffice with OOoLilyPond (<https://github.com/openlilylib/LO-ly>), an OpenOffice.org extension that converts LilyPond files into images within OpenOffice.org documents. OOoLilyPond (OLy) works with recent versions of LibreOffice and OpenOffice. Older versions should work as well. It has even been tested with OpenOffice 2.4 without issues.

### 4.4.3 Other programs

When integrating LilyPond scores into documents in other software, you have to effectively mimic how `lilypond-book` runs `lilypond`.

Here we discuss how to create PNG images for use with online formats similar to HTML, and PDF and EPS for print-out formats similar to PDF.

PDF documents are usually formatted to enable printing. This means that long pieces of music must be distributed over several pages. For this mode of operation, invoke `lilypond` as

```
lilypond -dseparate-page-formats=pdf myfile.ly
```

This creates `myfile-1.pdf`, `myfile-2.pdf`, ..., each containing a single page.

For embedding the images in a PostScript file, you can create EPS files, using `-dseparate-page-formats=eps`. In this case, you may also want to specify `-dno-gs-load-fonts -dinclude-eps-fonts`, otherwise the EPS files will not render if they are copied to another computer.

HTML documents are not printed, so they usually don't have to worry about splitting music images across page breaks, and you can use a single (possibly very tall) image to represent a long score. This can be achieved with

```
lilypond -dtall-page-formats=png myfile.ly
```

yielding a `myfile.png` that has all the pages of `myfile.ly` stacked vertically.

Specifying either `-dseparate-page-formats` or `-dtall-page-formats` suppresses the standard output mode (single file with multiple pages) and the associated `--formats` option. Both options take a comma-separated list of formats and can be specified together, e.g.

```
lilypond -dseparate-page-formats=eps,pdf -dtall-page-formats=png,svg myfile.ly
```

To reduce the margins around the pages pass the `-dno-use-paper-size-for-page` option to crop extraneous whitespace. The following paper settings will elide page numbers and other footers that enlarge the page.

```
\paper{
  indent=0\mm
  oddFooterMarkup=##f
  oddHeaderMarkup=##f
  bookTitleMarkup = ##f
  scoreTitleMarkup = ##f
}
```

```
... music ...
```

The above discusses how pages are dumped into output files, but for music integrated into text, you often don't want full pages (possibly including page numbers, margins etc.), but rather lines of music. This is achieved by including `lilypond-book-preamble.ly` before a fragment of music. This makes a toplevel `\score` block render into lines of music rather than pages.

If you need to quote many fragments from a large score, you can also use the clip systems feature, see Section “Extracting fragments of music” in *Notation Reference*.

## 4.5 Independent includes

Some users have produced files that can be `\included` with LilyPond to produce certain effects and those listed below are part of the LilyPond distribution. Also see Section “Working with input files” in *Notation Reference*.

### 4.5.1 MIDI articulation

The Articulate (<http://www.nicta.com.au/articulate>) project is an attempt to enhance LilyPond's MIDI output and works by adjusting note lengths (that are not under slurs) according to the articulation markings attached to them. For example, a ‘staccato’ halves the note value, ‘tenuto’ gives a note its full duration and so on. See Section “Enhancing MIDI output” in *Notation Reference*.

## 5 Suggestions for writing files

Now you're ready to begin writing larger LilyPond input files – not just the little examples in the tutorial, but whole pieces. But how should you go about doing it?

As long as LilyPond can understand your input files and produce the output that you want, it doesn't matter what your input files look like. However, there are a few other things to consider when writing LilyPond input files.

- What if you make a mistake? The structure of a LilyPond file can make certain errors easier (or harder) to find.
- What if you want to share your input files with somebody else? In fact, what if you want to alter your own input files in a few years? Some LilyPond input files are understandable at first glance; others may leave you scratching your head for an hour.
- What if you want to upgrade your LilyPond file for use with a later version of LilyPond? The input syntax changes occasionally as LilyPond improves. Most changes can be done automatically with `convert-ly`, but some changes might require manual assistance. LilyPond input files can be structured in order to be easier (or harder) to update.

### 5.1 General suggestions

Here are a few suggestions that can help to avoid (and fix) the most common problems when typesetting:

- **Always include a `\version` number in your input files** no matter how small they are. This prevents having to remember which version of LilyPond the file was created with and is especially relevant when Chapter 2 [Updating files with `convert-ly`], page 18, command (which requires the `\version` statement to be present); or if sending your input files to other users (e.g., when asking for help on the mail lists). Note that all of the LilyPond templates contain `\version` numbers.
- **For each line in your input file, write one bar of music.** This will make debugging any problems in your input files much simpler.
- **Include Section “Bar and bar number checks” in *Notation Reference* as well as Section “Octave checks” in *Notation Reference*.** Including ‘checks’ of this type in your input files will help pinpoint mistakes more quickly. How often checks are added will depend on the complexity of the music being typeset. For simple compositions, checks added at a few at strategic points within the music can be enough but for more complex music, with many voices and/or staves, checks may be better placed after every bar.
- **Add comments within input files.** References to musical themes (i.e. ‘second theme in violins’, ‘fourth variation,’ etc.), or simply including bar numbers as comments, will make navigating the input file much simpler especially if something needs to be altered later on or if passing on LilyPond input files to another person.
- **Add explicit note durations at the start of ‘sections’.** For example, `c4 d e f` instead of just `c d e f` can make rearranging the music later on simpler.
- **Learn to indent and align braces and parallel music.** Many problems are often caused by either ‘missing’ braces. Clearly indenting ‘opening’ and ‘closing’ braces (or `<<` and `>>` indicators) will help avoid such problems. For example;

```
\new Staff {
  \relative {
    r4 g'8 g c8 c4 d |
    e4 r8 |
    % Ossia section
  <<
```

```

        { f8 c c | }
        \new Staff {
            f8 f c |
        }
    >>
    r4 |
}

```

is much easier to follow than;

```

\new Staff { \relative { r4 g'8 g c4 c8 d | e4 r8
% Ossia section
<< { f8 c c } \new Staff { f8 f c } >> r4 | } }

```

- **Keep music and style separate** by putting overrides in the `\layout` block;

```

\score {
    ...music...
    \layout {
        \override TabStaff.Stemstencil = ##f
    }
}

```

This will not create a new context but it will apply when one is created. Also see Section “Saving typing with variables and functions” in *Learning Manual*, and Section “Style sheets” in *Learning Manual*.

## 5.2 Typesetting existing music

If you are entering music from an existing score (i.e., typesetting a piece of existing sheet music),

- Enter the manuscript (the physical copy of the music) into LilyPond one system at a time (but still only one bar per line of text), and check each system when you finish it. You may use the `showLastLength` or `showFirstLength` properties to speed up processing – see Section “Skipping corrected music” in *Notation Reference*.
- Define `mBreak = { \break }` and insert `\mBreak` in the input file whenever the manuscript has a line break. This makes it much easier to compare the LilyPond music to the original music. When you are finished proofreading your score, you may define `mBreak = { }` to remove all those line breaks. This will allow LilyPond to place line breaks wherever it feels are best.
- When entering a part for a transposing instrument into a variable, it is recommended that the notes are wrapped in

```
\transpose c natural-pitch {...}
```

(where `natural-pitch` is the open pitch of the instrument) so that the music in the variable is effectively in C. You can transpose it back again when the variable is used, if required, but you might not want to (e.g., when printing a score in concert pitch, converting a trombone part from treble to bass clef, etc.). Mistakes in transpositions are less likely if all the music in variables is at a consistent pitch.

Also, only ever transpose to/from C. That means that the only other keys you will use are the natural pitches of the instruments – bes for a B-flat trumpet, aes for an A-flat clarinet, etc.

## 5.3 Large projects

When working on a large project, having a clear structure to your lilypond input files becomes vital.



- **Use a variable for each voice**, with a minimum of structure inside the definition. The structure of the `\score` section is the most likely thing to change; the violin definition is extremely unlikely to change in a new version of LilyPond.

```
violin = \relative {
  g'4 c'8. e16
}
...
\score {
  \new GrandStaff {
    \new Staff {
      \violin
    }
  }
}
```

- **Separate tweaks from music definitions.** This point was made previously, but for large projects it is absolutely vital. We might need to change the definition of `fthenp`, but then we only need to do this once, and we can still avoid touching anything inside `violin`.

```
fthenp = _\markup{
  \dynamic f \italic \small { 2nd } \hspace #0.1 \dynamic p }
violin = \relative {
  g'4\fthenp c'8. e16
}
```

## 5.4 Troubleshooting

Sooner or later, you will write a file that LilyPond cannot compile. The messages that LilyPond gives may help you find the error, but in many cases you need to do some investigation to determine the source of the problem.

The most powerful tools for this purpose are the single line comment (indicated by `%`) and the block comment (indicated by `%{...%}`). If you don't know where a problem is, start commenting out huge portions of your input file. After you comment out a section, try compiling the file again. If it works, then the problem must exist in the portion you just commented. If it doesn't work, then keep on commenting out material until you have something that works.

In an extreme case, you might end up with only

```
\score {
  <<
    % \melody
    % \harmony
    % \bass
  >>
  \layout{}
}
```

(in other words, a file without any music)

If that happens, don't give up. Uncomment a bit – say, the bass part – and see if it works. If it doesn't work, then comment out all of the bass music (but leave `\bass` in the `\score` uncommented).

```
bass = \relative {
  %{
    c'4 c c c
    d d d d
```

```
%}
}
```

Now start slowly uncommenting more and more of the bass part until you find the problem line.

Another very useful debugging technique is constructing Section “Tiny examples” in *General Information*.

## 5.5 Make and Makefiles

Pretty well all the platforms LilyPond can run on support a software facility called make. This software reads a special file called a Makefile that defines what files depend on what others and what commands you need to give the operating system to produce one file from another. For example the makefile would spell out how to produce ballad.pdf and ballad.midi from ballad.ly by running LilyPond.

There are times when it is a good idea to create a Makefile for your project, either for your own convenience or as a courtesy to others who might have access to your source files. This is true for very large projects with many included files and different output options (e.g., full score, parts, conductor’s score, piano reduction, etc.), or for projects that require difficult commands to build them (such as lilypond-book projects). Makefiles vary greatly in complexity and flexibility, according to the needs and skills of the authors. The program GNU Make comes installed on GNU/Linux distributions and on MacOS X, and it is also available for Windows.

See the **GNU Make Manual** for full details on using make, as what follows here gives only a glimpse of what it can do.

The commands to define rules in a makefile differ according to platform; for instance the various forms of GNU/Linux and MacOS use bash, while Windows uses cmd. Note that on MacOS X, you need to configure the system to use the command-line interpreter. Here are some example makefiles, with versions for both GNU/Linux/MacOS and Windows.

The first example is for an orchestral work in four movements with a directory structure as follows:

```
Symphony/
|-- MIDI/
|-- Makefile
|-- Notes/
|   |-- cello.ily
|   |-- figures.ily
|   |-- horn.ily
|   |-- oboe.ily
|   |-- trioString.ily
|   |-- viola.ily
|   |-- violinOne.ily
|   |-- violinTwo.ily
|-- PDF/
|-- Parts/
|   |-- symphony-cello.ly
|   |-- symphony-horn.ly
|   |-- symphony-oboe.ly
|   |-- symphony-violin.ly
|   |-- symphony-violinOne.ly
|   |-- symphony-violinTwo.ly
|-- Scores/
|   |-- symphony.ly
```

```

|   |-- symphonyI.ly
|   |-- symphonyII.ly
|   |-- symphonyIII.ly
|   `-- symphonyIV.ly
|-- symphonyDefs.ily

```

The .ly files in the Scores and Parts directories get their notes from .ily files in the Notes directory:

```

%%% top of file "symphony-cello.ly"
\include "../symphonyDefs.ily"
\include "../Notes/cello.ily"

```

The makefile will have targets of score (entire piece in full score), movements (individual movements in full score), and parts (individual parts for performers). There is also a target archive that will create a tarball of the source files, suitable for sharing via web or email. Here is the makefile for GNU/Linux or MacOS X. It should be saved with the name Makefile in the top directory of the project:

**Note:** When a target or pattern rule is defined, the subsequent lines must begin with tabs, not spaces.

```

# the name stem of the output files
piece := symphony
# The command to run lilypond
LILY_CMD := lilypond -ddelete-intermediate-files \
            -dno-point-and-click

# The suffixes used in this Makefile.
.SUFFIXES: .ly .ily .pdf .midi

.DEFAULT_GOAL := score

PDFDIR := PDF
MIDIDIR := MIDI

# Input and output files are searched in the directories listed in
# the VPATH variable. All of them are subdirectories of the current
# directory (given by the GNU make variable `CURDIR').
VPATH := \
    $(CURDIR)/Scores \
    $(CURDIR)/Parts \
    $(CURDIR)/Notes \
    $(CURDIR)/$(PDFDIR) \
    $(CURDIR)/$(MIDIDIR)

# The pattern rule to create PDF and MIDI files from a LY input file.
# The .pdf output files are put into the `PDF' subdirectory, and the
# .midi files go into the `MIDI' subdirectory.
%.pdf %.midi: %.ly | $(PDFDIR) $(MIDIDIR)
$(LILY_CMD) $<          # this line begins with a tab
mv "$*.pdf" $(PDFDIR)/ # this line begins with a tab
mv "$*.midi" $(MIDIDIR)/ # this line begins with a tab

```

```

$(PDFDIR):
mkdir $(PDFDIR)

$(MIDIDIR):
mkdir $(MIDIDIR)

common := symphonyDefs.ily

notes := \
    cello.ily \
    horn.ily \
    oboe.ily \
    viola.ily \
    violinOne.ily \
    violinTwo.ily

# The dependencies of the movements.
$(piece)I.pdf: $(piece)I.ly $(notes) $(common)
$(piece)II.pdf: $(piece)II.ly $(notes) $(common)
$(piece)III.pdf: $(piece)III.ly $(notes) $(common)
$(piece)IV.pdf: $(piece)IV.ly $(notes) $(common)

# The dependencies of the full score.
$(piece).pdf: $(piece).ly $(notes) $(common)

# The dependencies of the parts.
$(piece)-cello.pdf: $(piece)-cello.ly cello.ily $(common)
$(piece)-horn.pdf: $(piece)-horn.ly horn.ily $(common)
$(piece)-oboe.pdf: $(piece)-oboe.ly oboe.ily $(common)
$(piece)-viola.pdf: $(piece)-viola.ly viola.ily $(common)
$(piece)-violinOne.pdf: $(piece)-violinOne.ly violinOne.ily $(common)
$(piece)-violinTwo.pdf: $(piece)-violinTwo.ly violinTwo.ily $(common)

# Type `make score' to generate the full score of all four
# movements as one file.
.PHONY: score
score: $(piece).pdf

# Type `make parts' to generate all parts.
# Type `make symphony-foo.pdf' to generate the part for instrument `foo'.
# Example: `make symphony-cello.pdf'.
.PHONY: parts
parts: $(piece)-cello.pdf \
    $(piece)-violinOne.pdf \
    $(piece)-violinTwo.pdf \
    $(piece)-viola.pdf \
    $(piece)-oboe.pdf \
    $(piece)-horn.pdf

# Type `make movements' to generate files for the
# four movements separately.
.PHONY: movements

```

```

movements: $(piece)I.pdf \
            $(piece)II.pdf \
            $(piece)III.pdf \
            $(piece)IV.pdf

```

```
all: score parts movements
```

There are special complications on the Windows platform. After downloading and installing GNU Make for Windows, you must set the correct path in the system's environment variables so that the DOS shell can find the Make program. To do this, right-click on "My Computer," then choose Properties and Advanced. Click Environment Variables, and then in the System Variables pane, highlight Path, click edit, and add the path to the GNU Make executable file, which will look something like this:

```
C:\Program Files\GnuWin32\bin
```

The makefile itself has to be altered to handle different shell commands and to deal with spaces that are present in some default system directories. Windows also has a different default extension for midi files.

```

## WINDOWS VERSION
##
piece := symphony
LILY_CMD := lilypond -ddelete-intermediate-files \
              -dno-point-and-click

#get the 8.3 name of CURDIR (workaround for spaces in PATH)
workdir := $(shell for /f "tokens=*" %%b in ("$(CURDIR)") \
do @echo %%~sb)

.SUFFIXES: .ly .ily .pdf .mid

.DEFAULT_GOAL := score

PDFDIR := PDF
MIDIDIR := MIDI

VPATH := \
    $(workdir)/Scores \
    $(workdir)/Parts \
    $(workdir)/Notes \
    $(workdir)/$(PDFDIR) \
    $(workdir)/$(MIDIDIR)

%.pdf %.mid: %.ly | $(PDFDIR) $(MIDIDIR)
    $(LILY_CMD) $< # this line begins with a tab
    move /Y "$*.pdf" $(PDFDIR)/ # begin with tab
    move /Y "$*.mid" $(MIDIDIR)/ # begin with tab

$(PDFDIR):
    mkdir $(PDFDIR)/

$(MIDIDIR):
    mkdir $(MIDIDIR)/

```

```

notes := \
  cello.ily \
  figures.ily \
  horn.ily \
  oboe.ily \
  trioString.ily \
  viola.ily \
  violinOne.ily \
  violinTwo.ily

common := symphonyDefs.ily

$(piece)I.pdf: $(piece)I.ly $(notes) $(common)
$(piece)II.pdf: $(piece)II.ly $(notes) $(common)
$(piece)III.pdf: $(piece)III.ly $(notes) $(common)
$(piece)IV.pdf: $(piece)IV.ly $(notes) $(common)

$(piece).pdf: $(piece).ly $(notes) $(common)

$(piece)-cello.pdf: $(piece)-cello.ly cello.ily $(common)
$(piece)-horn.pdf: $(piece)-horn.ly horn.ily $(common)
$(piece)-oboe.pdf: $(piece)-oboe.ly oboe.ily $(common)
$(piece)-viola.pdf: $(piece)-viola.ly viola.ily $(common)
$(piece)-violinOne.pdf: $(piece)-violinOne.ly violinOne.ily $(common)
$(piece)-violinTwo.pdf: $(piece)-violinTwo.ly violinTwo.ily $(common)

.PHONY: score
score: $(piece).pdf

.PHONY: parts
parts: $(piece)-cello.pdf \
      $(piece)-violinOne.pdf \
      $(piece)-violinTwo.pdf \
      $(piece)-viola.pdf \
      $(piece)-oboe.pdf \
      $(piece)-horn.pdf

.PHONY: movements
movements: $(piece)I.pdf \
           $(piece)II.pdf \
           $(piece)III.pdf \
           $(piece)IV.pdf

all: score parts movements

```

The next Makefile is for a lilypond-book document done in LaTeX. This project has an index, which requires that the latex command be run twice to update links. Output files are all stored in the out directory for .pdf output and in the htmlout directory for the html output.

```

SHELL=/bin/sh
FILE=myproject
OUTDIR=out

```

```

WEBDIR=htmlout
VIEWER=acroread
BROWSER=firefox
LILYBOOK_PDF=lilypond-book --output=$(OUTDIR) --pdf $(FILE).lytex
LILYBOOK_HTML=lilypond-book --output=$(WEBDIR) $(FILE).lytex
PDF=cd $(OUTDIR) && pdflatex $(FILE)
HTML=cd $(WEBDIR) && latex2html $(FILE)
INDEX=cd $(OUTDIR) && makeindex $(FILE)
PREVIEW=$(VIEWER) $(OUTDIR)/$(FILE).pdf &

all: pdf web keep

pdf:
    $(LILYBOOK_PDF) # begin with tab
    $(PDF)          # begin with tab
    $(INDEX)        # begin with tab
    $(PDF)          # begin with tab
    $(PREVIEW)      # begin with tab

web:
    $(LILYBOOK_HTML) # begin with tab
    $(HTML)          # begin with tab
    cp -R $(WEBDIR)/$(FILE)/ ./ # begin with tab
    $(BROWSER) $(FILE)/$(FILE).html & # begin with tab

keep: pdf
    cp $(OUTDIR)/$(FILE).pdf $(FILE).pdf # begin with tab

clean:
    rm -rf $(OUTDIR) # begin with tab

web-clean:
    rm -rf $(WEBDIR) # begin with tab

archive:
    tar -cvvf myproject.tar \ # begin this line with tab
    --exclude=out/* \
    --exclude=htmlout/* \
    --exclude=myproject/* \
    --exclude=*midi \
    --exclude=*pdf \
    --exclude=*~ \
    ../MyProject/*

```

TODO: make this thing work on Windows

The previous makefile does not work on Windows. An alternative for Windows users would be to create a simple batch file containing the build commands. This will not keep track of dependencies the way a makefile does, but it at least reduces the build process to a single command. Save the following code as `build.bat` or `build.cmd`. The batch file can be run at the DOS prompt or by simply double-clicking its icon.

```

lilypond-book --output=out --pdf myproject.lytex
cd out

```

```
pdflatex myproject
makeindex myproject
pdflatex myproject
cd ..
copy out\myproject.pdf MyProject.pdf
```

**See also**

This manual: Section 1.2 [Command-line usage], page 1, Chapter 3 [Running lilypond-book], page 23.



# Appendix A GNU Free Documentation License

Version 1.3, 3 November 2008

Copyright © 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.  
<https://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

## 0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document *free* in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of “copyleft”, which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

## 1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The “Document”, below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as “you”. You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A “Modified Version” of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A “Secondary Section” is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document’s overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The “Invariant Sections” are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The “Cover Texts” are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A “Transparent” copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not “Transparent” is called “Opaque”.

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The “Title Page” means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, “Title Page” means the text near the most prominent appearance of the work’s title, preceding the beginning of the body of the text.

The “publisher” means any person or entity that distributes copies of the Document to the public.

A section “Entitled XYZ” means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as “Acknowledgements”, “Dedications”, “Endorsements”, or “History”.) To “Preserve the Title” of such a section when you modify the Document means that it remains a section “Entitled XYZ” according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

## 2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

## 3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document’s license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both

covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

#### 4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its

Title Page, then add an item describing the Modified Version as stated in the previous sentence.

- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the “History” section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled “Acknowledgements” or “Dedications”, Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled “Endorsements”. Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled “Endorsements” or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version’s license notice. These titles must be distinct from any other section titles.

You may add a section Entitled “Endorsements”, provided it contains nothing but endorsements of your Modified Version by various parties—for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

## 5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled “History” in the various original documents, forming one section Entitled “History”; likewise combine any sections Entitled “Acknowledgements”, and any sections Entitled “Dedications”. You must delete all sections Entitled “Endorsements.”

## 6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

## 7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an “aggregate” if the copyright resulting from the compilation is not used to limit the legal rights of the compilation’s users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document’s Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

## 8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled “Acknowledgements”, “Dedications”, or “History”, the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

## 9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

#### 10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <https://www.gnu.org/licenses/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License “or any later version” applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy’s public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

#### 11. RELICENSING

“Massive Multiauthor Collaboration Site” (or “MMC Site”) means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A “Massive Multiauthor Collaboration” (or “MMC”) contained in the site means any set of copyrightable works thus published on the MMC site.

“CC-BY-SA” means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

“Incorporate” means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is “eligible for relicensing” if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

## ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

```
Copyright (C)  year  your name.  
Permission is granted to copy, distribute and/or modify this document  
under the terms of the GNU Free Documentation License, Version 1.3  
or any later version published by the Free Software Foundation;  
with no Invariant Sections, no Front-Cover Texts, and no Back-Cover  
Texts. A copy of the license is included in the section entitled ``GNU  
Free Documentation License''.
```

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the “with...Texts.” line with this:

```
with the Invariant Sections being list their titles, with  
the Front-Cover Texts being list, and with the Back-Cover Texts  
being list.
```

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

## Appendix B LilyPond index

### A

|                             |    |
|-----------------------------|----|
| ABC .....                   | 48 |
| Aborted (core dumped) ..... | 14 |
| Articulate project .....    | 51 |

### B

|                                        |        |
|----------------------------------------|--------|
| <i>Bar and bar number checks</i> ..... | 15, 52 |
| <i>Bar lines</i> .....                 | 15     |

### C

|                                         |    |
|-----------------------------------------|----|
| call trace .....                        | 14 |
| chroot jail, running inside .....       | 3  |
| Coda Technology .....                   | 49 |
| <i>Collision resolution</i> .....       | 17 |
| coloring, syntax .....                  | 45 |
| command line options for lilypond ..... | 2  |
| convert-ly .....                        | 18 |

### D

|                                    |    |
|------------------------------------|----|
| <i>Debugging Scheme code</i> ..... | 7  |
| directory, redirect output .....   | 5  |
| DocBook, adding music .....        | 23 |
| docbook .....                      | 23 |
| documents, adding music .....      | 23 |
| dvips .....                        | 35 |

### E

|                                                    |        |
|----------------------------------------------------|--------|
| <i>Easier editing</i> .....                        | 46, 50 |
| editors .....                                      | 45     |
| emacs .....                                        | 45     |
| <i>Enhancing MIDI output</i> .....                 | 51     |
| Enigma Transport Format .....                      | 49     |
| enigma .....                                       | 49     |
| error messages .....                               | 14     |
| error .....                                        | 14     |
| errors, message format .....                       | 14     |
| ETF .....                                          | 49     |
| Evince .....                                       | 44     |
| <i>Explicitly instantiating voices</i> .....       | 17     |
| expression evaluation, Scheme .....                | 2      |
| External programs, generating LilyPond files ..... | 50     |
| <i>Extracting fragments of music</i> .....         | 7, 51  |

### F

|                                                       |    |
|-------------------------------------------------------|----|
| fatal error .....                                     | 14 |
| file searching .....                                  | 3  |
| file size, output .....                               | 44 |
| Finale .....                                          | 49 |
| <i>Flexible vertical spacing within systems</i> ..... | 16 |
| format, output .....                                  | 2  |
| fragments, music .....                                | 51 |

### H

|                                                            |    |
|------------------------------------------------------------|----|
| \header in L <sup>A</sup> T <sub>E</sub> X documents ..... | 28 |
| HTML, adding music .....                                   | 23 |
| HTML, embeddable SVG scores .....                          | 5  |
| HTML .....                                                 | 23 |

### I

|                         |    |
|-------------------------|----|
| invoking dvips .....    | 35 |
| Invoking lilypond ..... | 2  |

### L

|                                       |    |
|---------------------------------------|----|
| LANG .....                            | 10 |
| LaTeX, adding music .....             | 23 |
| LaTeX .....                           | 23 |
| LibreOffice.org .....                 | 50 |
| LILYPOND_DATADIR .....                | 10 |
| LILYPOND_LOCALEDIR .....              | 10 |
| LILYPOND_LOGLEVEL .....               | 10 |
| LILYPOND_RELOCDIR .....               | 10 |
| loglevel .....                        | 4  |
| Lua <sub>T</sub> E <sub>X</sub> ..... | 50 |
| lyluatex .....                        | 50 |

### M

|                                |        |
|--------------------------------|--------|
| make .....                     | 55     |
| makefiles .....                | 55     |
| <i>Manuals</i> .....           | 1      |
| MIDI .....                     | 46, 51 |
| modes, editor .....            | 45     |
| music fragments, quoting ..... | 51     |
| musicology .....               | 23     |
| MusicXML .....                 | 47     |

### O

|                                               |    |
|-----------------------------------------------|----|
| <i>Octave checks</i> .....                    | 52 |
| OOoLilyPond .....                             | 50 |
| OpenOffice.org .....                          | 50 |
| options, command line .....                   | 2  |
| <i>Other sources of information</i> .....     | 45 |
| outline fonts .....                           | 35 |
| output, directory .....                       | 5  |
| output, format .....                          | 2  |
| output, PDF (Portable Document Format) .....  | 5  |
| output, PNG (Portable Network Graphics) ..... | 5  |
| output, PS (PostScript) .....                 | 5  |
| output, setting filename .....                | 5  |
| output, SVG (Scalable Vector Graphics) .....  | 5  |
| output, verbosity .....                       | 4  |



**P**

|                                               |    |
|-----------------------------------------------|----|
| PDF (Portable Document Format), output .....  | 5  |
| PNG (Portable Network Graphics), output ..... | 5  |
| point and click, command line .....           | 6  |
| point and click .....                         | 43 |
| PostScript (PS), output .....                 | 5  |
| <i>Predefined paper sizes</i> .....           | 32 |
| preview image .....                           | 30 |
| Programming error .....                       | 14 |
| PS (PostScript), output .....                 | 5  |
| pspdfopt .....                                | 5  |

**Q**

|                                |    |
|--------------------------------|----|
| quoting, music fragments ..... | 51 |
|--------------------------------|----|

**R**

|                                 |    |
|---------------------------------|----|
| <i>Real music example</i> ..... | 17 |
| relocation .....                | 11 |

**S**

|                                                         |    |
|---------------------------------------------------------|----|
| <i>Saving typing with variables and functions</i> ..... | 53 |
| Scheme error .....                                      | 14 |
| Scheme, expression evaluation .....                     | 2  |
| search path .....                                       | 3  |
| <i>Single-staff polyphony</i> .....                     | 17 |
| <i>Skipping corrected music</i> .....                   | 53 |
| <i>Staff</i> .....                                      | 46 |
| <i>Style sheets</i> .....                               | 53 |
| SVG (Scalable Vector Graphics), output .....            | 5  |

|                       |    |
|-----------------------|----|
| switches .....        | 2  |
| syntax coloring ..... | 45 |

**T**

|                                 |    |
|---------------------------------|----|
| texi .....                      | 23 |
| Texinfo, adding music .....     | 23 |
| texinfo .....                   | 23 |
| <i>Text encoding</i> .....      | 16 |
| thumbnail .....                 | 30 |
| <i>Tiny examples</i> .....      | 55 |
| titling and lilypond-book ..... | 28 |
| titling in HTML .....           | 30 |
| trace, Scheme .....             | 14 |
| <i>Tutorial</i> .....           | 1  |
| type1 fonts .....               | 35 |

**U**

|                                |    |
|--------------------------------|----|
| Updating a LilyPond file ..... | 18 |
| updating old input files ..... | 18 |

**V**

|                    |    |
|--------------------|----|
| vim .....          | 45 |
| <i>Voice</i> ..... | 46 |

**W**

|                                        |    |
|----------------------------------------|----|
| warning .....                          | 14 |
| web pages, SVG scores embeddable ..... | 5  |
| <i>Working with input files</i> .....  | 51 |